

2010



 **WAC LIGHTING**
Responsible Lighting




New LEDme™ Downlights utilize the latest in energy efficient LED technology and are engineered for precise thermal and optical performance. With a clean, architectural design, these new trims are ideal for both upscale residential and commercial applications. Available in 2, 3 and 4 inch, as well as 4 inch Invisible Trim™ styles.

HR-LED421-WT/WT LEDme™ Downlights


- **Full scale dimming to 1%**
 - Optimal dimming with Electronic Low Voltage (ELV) dimmer
- **Light level for 3000K, 74 foot candles at 5 feet, 29 foot candles at 8 feet**
 - Comparable to 45W BR30 for IC and 50W PAR20 for Non-IC
- **Narrow flood beam spread and 35° visual cutoff**
 - For comfortable general and task lighting
- **Replaceable LED Module**
 - For optimal performance and color consistency we only use ANSI Compliant Warm/Neutral LED Bins from top manufacturers including Cree®, Philips Lumileds and Nichia
- **50,000 hour potential life**
- **Less than 1/8" thick, super low profile die-cast aluminum trim**
 - Powder coated or Plated Brushed Nickel finishes




BK/BN
WT/WT
BK/WT




WT/WT
BK/WT
BK/BN




CH
WT



BK/WT
BK/BN
WT/WT



WT
CH



LEDme™ DOWNLIGHTS

Model	Finish	Interior/Trim
HR-LED411 Round, Reflector	BK/BN	Black/Brushed Nickel
HR-LED421 Round, Baffle	BK/WT	Black/White
HR-LED451 Square, Reflector	WT/WT	White/White

Example Order: **HR-LED411-WT/WT**


LEDme™ SHOWER LIGHT

UL listed for wet locations

Model	Finish	Trim
HR-LED431 Round	CH	Chrome
HR-LED471 Square	WT	White

Tempered borosilicate glass lens.

Example Order: **HR-LED471-CH**




NEW CONSTRUCTION HOUSING

Model	Type	Input (power)	Output (light)	Color
HR-LED418-NIC-W	IC *	11 watts	380 lumens	3000K
HR-LED418-N-W	Non-IC †	18 watts	480 lumens	3000K
HR-LED418-NIC-C	IC *	11 watts	457 lumens	4500K
HR-LED418-N-C	Non-IC †	18 watts	600 lumens	4500K

LEDs included. * Suitable for direct contact with insulation. † 3" clearance on all sides must be maintained when insulation is present.

Example Order: **HR-LED418-NIC-W**



REMODEL HOUSING

Model	Type	Input (power)	Output (light)	Color
HR-LED418-RIC-W	IC *	11 watts	380 lumens	3000K
HR-LED418-R-W	Non-IC †	18 watts	480 lumens	3000K
HR-LED418-RIC-C	IC *	11 watts	457 lumens	4500K
HR-LED418-R-C	Non-IC †	18 watts	600 lumens	4500K

LEDs included. * Suitable for direct contact with insulation. † 3" clearance on all sides must be maintained when insulation is present.

Example Order: **HR-LED418-R-C**

New Invisible Trim™ Downlights from WAC Lighting offer a seamless solution to recessed lighting with minimal edge detail. Invisible Trims™ are designed to sit flush with, not below the ceiling line, creating a sophisticated, architectural look.

• **Full scale dimming to 1%**

- Optimal dimming with Electronic Low Voltage (ELV) dimmer

• **Light level for 3000K, 74 foot candles at 5 feet, 29 foot candles at 8 feet**

- Comparable to 45W BR30 for IC and 50W PAR20 for Non-IC

• **Narrow flood beam spread and 35° visual cutoff**

- For comfortable general and task lighting

• **Replaceable LED Module**

- For optimal performance and color consistency we only use ANSI Compliant Warm/Neutral LED Bins from top manufacturers including Cree®, Philips Lumileds and Nichia


• **50,000 hour potential life**

• **Less than 1/8" thick, super low profile die-cast aluminum trim**


- Powder coated or Plated Brushed Nickel finishes




BK/BN
WT/WT
BK/WT



WT/WT
BK/WT
BK/BN



BK/WT
BK/BN
WT/WT




LEDme™ INVISIBLE TRIM™ DOWNLIGHTS


Model	Finish	Interior/Trim
HR-LED411TL	Round, Reflector	BK/BN Black/Brushed Nickel
HR-LED421TL	Round, Baffle	BK/WT Black/White
HR-LED451TL	Square, Reflector	WT/WT White/White

Example Order: **HR-LED451TL-BK/BN**


NEW CONSTRUCTION installation instructions

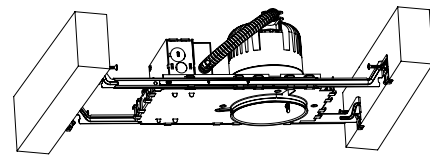


1. Nail or screw housing frame to ceiling joists with pre-set nailing screws prior to installing drywall ceiling.

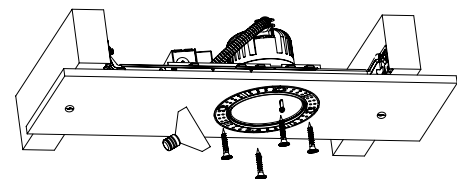

2. Cut hole in drywall and attach to ceiling, secure spackle trim to housing; self-centering holes allow for accurate alignment. Spackle over exposed metal trim.

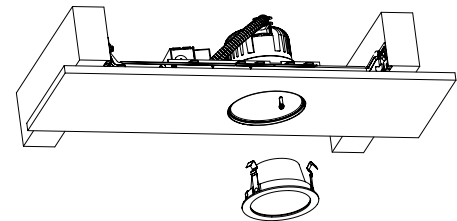

3. Fit trim to housing and align with spackle trim inset to complete the minimalist look.




ROUND SPACKLE TRIM, NEW CONSTRUCTION HOUSING

Model	Type	Input (power)	Output (light)	Color
HR-LED418-NIC-ROW	IC *	11 watts	380 lumens	3000K
HR-LED418-N-ROW	Non-IC †	18 watts	480 lumens	3000K
HR-LED418-NIC-ROC	IC *	11 watts	457 lumens	4500K
HR-LED418-N-ROC	Non-IC †	18 watts	600 lumens	4500K

LEDs included. * Suitable for direct contact with insulation. † 3" clearance on all sides must be maintained when insulation is present.

Example Order: **HR-LED418-NIC-ROW**



SQUARE SPACKLE TRIM, NEW CONSTRUCTION HOUSING

Model	Type	Input (power)	Output (light)	Color
HR-LED418-NIC-SQW	IC *	11 watts	380 lumens	3000K
HR-LED418-N-SQW	Non-IC †	18 watts	480 lumens	3000K
HR-LED418-NIC-SQC	IC *	11 watts	457 lumens	4500K
HR-LED418-N-SQC	Non-IC †	18 watts	600 lumens	4500K

LEDs included. * Suitable for direct contact with insulation. † 3" clearance on all sides must be maintained when insulation is present.


Example Order: **HR-LED418-N-SQW**

4" Invisible Trim™ downlights




HR-LED451TL-WT/WT LEDme™ Downlights


REMODEL installation instructions




1. Cut appropriate hole in existing drywall using the provided stencil.

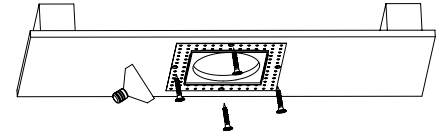


2. Secure spackle trim to drywall; self-centering holes allow for accurate alignment. Spackle over exposed metal trim.

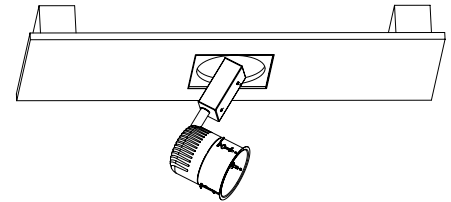

3. Slide remodel housing through hole, housing is held secure with tension spring clips allowing for easy removal.

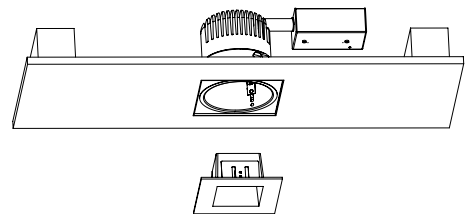

4. Fit trim to housing and align with spackle trim inset to complete the minimalist look.




ROUND SPACKLE TRIM, REMODEL HOUSING

Model	Type	Input	Output	Color
HR-LED418-RIC-ROW	IC *	11 watts	380 lumens	3000K
HR-LED418-R-ROW	Non-IC †	18 watts	480 lumens	3000K
HR-LED418-RIC-ROC	IC *	11 watts	457 lumens	4500K
HR-LED418-R-ROC	Non-IC †	18 watts	600 lumens	4500K

LEDs included. * Suitable for direct contact with insulation.
 † 3" clearance on all sides must be maintained when insulation is present.

Example Order: **HR-LED418-RIC-ROW**



SQUARE SPACKLE TRIM, REMODEL HOUSING

Model	Type	Input	Output	Color
HR-LED418-RIC-SQW	IC *	11 watts	380 lumens	3000K
HR-LED418-R-SQW	Non-IC †	18 watts	480 lumens	3000K
HR-LED418-RIC-SQC	IC *	11 watts	457 lumens	4500K
HR-LED418-R-SQC	Non-IC †	18 watts	600 lumens	4500K


LEDs included. * Suitable for direct contact with insulation.
 † 3" clearance on all sides must be maintained when insulation is present.

Example Order: **HR-LED418-R-SQC**


- **Full scale dimming to 1%**
 - Optimal dimming with Electronic Low Voltage (ELV) dimmer
- **Light level for 3000K, 41 foot candles at 5 feet, 16 foot candles at 8 feet**
 - Comparable to 50W R20 for IC and 45W BR30 for Non-IC
- **Narrow flood beam spread and 40° visual cutoff**
 - For comfortable general and task lighting
- **Replaceable LED Module**
 - For optimal performance and color consistency we only use ANSI Compliant Warm/Neutral LED Bins from top manufacturers including Cree®, Philips Lumileds and Nichia
- **50,000 hour potential life**
- **Less than 1/8" thick, super low profile die-cast aluminum trim**
 - Powder coated or Plated Brushed Nickel finishes




BK/BN
WT/WT
BK/WT




WT/WT
BK/WT
BK/BN




CH
WT



BK/WT
BK/BN
WT/WT



WT
CH



LEDme™ DOWNLIGHTS

Model	Finish	Interior/Trim
HR-LED311 Round, Reflector	BK/BN	Black/Brushed Nickel
HR-LED321 Round, Baffle	BK/WT	Black/White
HR-LED351 Square, Reflector	WT/WT	White/White

Example Order: **HR-LED311-WT/WT**


LEDme™ SHOWER LIGHT

UL listed for wet locations

Model	Finish	Trim
HR-LED331 Round	CH	Chrome
HR-LED371 Square	WT	White

Tempered borosilicate glass lens.

Example Order: **HR-LED371-CH**




NEW CONSTRUCTION HOUSING

Model	Type	Input (power)	Output (light)	Color
HR-LED309-NIC-W	IC *	6 watts	250 lumens	3000K
HR-LED309-N-W	Non-IC †	10 watts	350 lumens	3000K
HR-LED309-NIC-C	IC *	6 watts	277 lumens	4500K
HR-LED309-N-C	Non-IC †	10 watts	400 lumens	4500K

LEDs included. * Suitable for direct contact with insulation.
† 3" clearance on all sides must be maintained when insulation is present.

Example Order: **HR-LED309-NIC-C**



REMODEL HOUSING

Model	Type	Input (power)	Output (light)	Color
HR-LED309-RIC-W	IC *	6 watts	250 lumens	3000K
HR-LED309-R-W	Non-IC †	10 watts	350 lumens	3000K
HR-LED309-RIC-C	IC *	6 watts	277 lumens	4500K
HR-LED309-R-C	Non-IC †	10 watts	400 lumens	4500K

LEDs included. * Suitable for direct contact with insulation.
† 3" clearance on all sides must be maintained when insulation is present.

Example Order: **HR-LED309-R-W**

- **Dimming from 100% to 15% with existing wiring, improves with number of connected fixtures**
 - Optimal dimming with Electronic Low Voltage (ELV) dimmer
- **Light level for 3000K, 14 foot candles at 5 feet, 5 foot candles at 8 feet**
- **Narrow flood beam spread and 25° cutoff angle**
(for open reflector models)
 - For comfortable general and task lighting
- **Sold as new construction**
 - may be re-configured in field for remodel
- **Replaceable LED Module**
 - For optimal performance and color consistency we only use ANSI Compliant Warm/Neutral LED Bins from top manufacturers including Cree®, Philips Lumileds and Nichia
- **50,000 hour potential life**
- **Less than 1/8" thick, super low profile die-cast aluminum trim**
 - Powder coated finish




HR-LED212-W-WT LEDme™ Downlights




Adjustable downlights have a home docking position to ensure light is projected straight down when needed.

Remodel configuration



New construction configuration

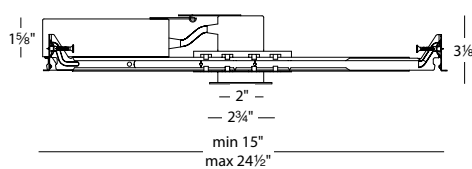

OPEN REFLECTOR

Model	Color Temp	Input (power)	Output (light)	Finish
HR-LED211 Round	W 3000K	3 watts	100 lumens	WT
HR-LED251 Square	C 4500K	3 watts	123 lumens	White

LEDs included. Integral housings and trims.

Example Order: **HR-LED211-C-WT**

20° ADJUSTMENT FROM VERTICAL

Model	Color Temp	Input (power)	Output (light)	Finish
HR-LED212 Round	W 3000K	3 watts	100 lumens	WT
HR-LED252 Square	C 4500K	3 watts	123 lumens	White

LEDs included. Integral housings and trims.

Example Order: **HR-LED252-W-WT**



New LEDme™ QUICK CONNECT™ Fixtures feature versatile, contemporary styling developed for both residential and commercial applications. LEDme™ Fixtures are exclusively designed using the latest energy efficient technology. These ultra-modern, streamlined fixtures feature superior durability and optimal heat dissipation, all while maintaining exceptional style and performance.



FORZA



The uniquely designed ORB retains the same profile regardless of the aiming direction.

ORB



- **Dimming from 100% to 15% or better**
 - Optimal dimming with Electronic Low Voltage (ELV) dimmer
 - Dimming for SOLORAIL™/DUORAIL™ is recommended with electronic transformer
- **Light level for 45° aiming angle, 18 foot candles at 6 feet, 8 foot candles at 9 feet**
 - Comparable to 35W MR16 lamp
- **360° horizontal rotation and 90° vertical adjustment**
- **Replaceable LED Module**
 - For optimal performance and color consistency we only use ANSI Compliant Warm/Neutral LED Bins from top manufacturers including Cree®, Philips Lumileds and Nichia
- **Compatible with 12V SOLORAIL™ and DUORAIL™ systems and with Monopoint Canopy** - (canopy sold separately, see table below)
- **30,000 hour potential life**
- **Die-cast aluminum construction**
 - Brushed Nickel, electroplated Chrome and abrasion resistant Dark Bronze finishes

LEDme™ QUICK CONNECT™ FIXTURES

Model	Extension (H)	Finish	Input (power)	Output (light)	Color Temp
QF-LED-171 ORB	X3 (3")	BN Brushed Nickel	7.5 watts	280 lumens	3000K
QF-LED-173 FORZA	X6 (6")	CH Chrome			
	X12 (12")	DB Dark Bronze			



LEDs included.

Example Order: **QF-LED-171X6-BN**

LEDme™ MONOPOINT CANOPY

Model	Finish	Maximum Output
QMP-LED10M	BN CH DB	12V / 10W

Mounts to a standard 4" junction box, integral magnetic transformer. Also accepts LEDme™ QUICK CONNECT™ Pendants.



New LEDme™ QUICK CONNECT™ Pendants bring a clean, modern look to both commercial and residential settings. These stylish pendants are exclusively designed using the latest energy efficient technology and provide a strong and consistent light source. The evolutionary design and sleek, compact size results in a stunning decorative accent.



• **Dimming from 100% to 15% or better**

- Optimal dimming with Electronic Low Voltage (ELV) dimmer
- Dimming for SOLORAIL™/DUORAIL™ is recommended with electronic transformer

• **Replaceable LED Module**

- For optimal performance and color consistency we only use ANSI Compliant Warm/Neutral LED Bins from top manufacturers including Cree®, Philips Lumileds and Nichia



• **50,000 hour potential life**

• **Die-cast aluminum construction**

- Brushed Nickel finish

• **Compatible with 12V SOLORAIL™ and DUORAIL™ systems or as an individual pendant**

- Easy adjustment monopoint canopy and LEDme™ socket set with 4 inch adjustability included with MP models

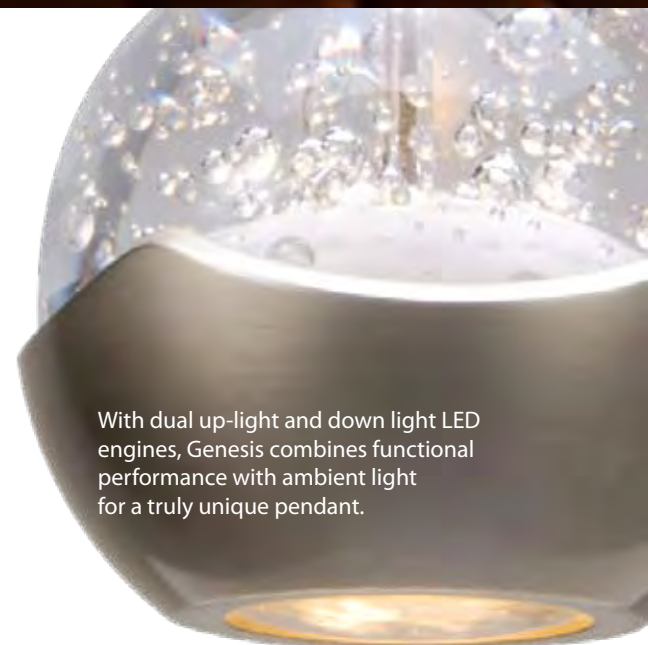


With dual up-light and down light LED engines, Genesis combines functional performance with ambient light for a truly unique pendant.

GENESIS

Mounting Options	Model	Finish – Pendant/Adapter	Input (power)	Output (light)	Color Temp
MP* Canopy	LED311	BN/BN Brushed Nickel/Brushed Nickel	5 watts	210 lumens	3000K
QP SOLORAIL™		BN/CH Brushed Nickel/Chrome			
DUORAIL™		BN/DB Brushed Nickel/Dark Bronze			


LEDs included. MP models include canopy and 72" braided wire. *Only available in BN/BN. QP models include QUICK CONNECT™ socket set and 72" braided wire.

Example Order: **MP-LED311-BN/BN** or **QPLED311-BN/CH**





- **Dimming from 100% to 15% or better**
 - Optimal dimming with Electronic Low Voltage (ELV) dimmer
 - Dimming for SOLORAIL™/DUORAIL™ is recommended with electronic transformer
- **Replaceable LED Module**
 - For optimal performance and color consistency we only use ANSI Compliant Warm/Neutral LED Bins from top manufacturers including Cree®, Philips Lumileds and Nichia
- **50,000 hour potential life**
- **Die-cast aluminum construction**
 - Brushed Nickel finish
- **Compatible with 12V SOLORAIL™ and DUORAIL™ systems or as an individual pendant**
 - Easy adjustment monopoint canopy and LEDme™ socket set with 4 inch adjustability included with MP models




Über's glimmering translucent diffuser gently spreads light through distinctive, anodized black fins for a brilliantly accented LED pendant.

ÜBER

Mounting Options	Model	Finish – Pendant/Adapter	Input (power)	Output (light)	Color Temp
MP* Canopy	LED315	BK/BN Glossy Black/Brushed Nickel	4.5 watts	180 lumens	3000K
QP SOLORAIL™		BK/CH Glossy Black/Chrome			
DUORAIL™		BK/DB Glossy Black/Dark Bronze			


LEDs included. MP models include canopy and 72" braided wire. *Only available in BK/BN. QP models include QUICK CONNECT™ socket set and 72" braided wire.

Example Order: **MP-LED315-BK/BN** or **QPLED315-BK/CH**





- **Dimming from 100% to 15% or better**
 - Optimal dimming with Electronic Low Voltage (ELV) dimmer
 - Dimming for SOLORAIL™/DUORAIL™ is recommended with electronic transformer
- **Replaceable LED Module**
 - For optimal performance and color consistency we only use ANSI Compliant Warm/Neutral LED Bins from top manufacturers including Cree®, Philips Lumileds and Nichia
- **50,000 hour potential life**
- **Die-cast aluminum construction**
 - Brushed Nickel finish
- **Compatible with 12V SOLORAIL™ and DUORAIL™ systems or as an individual pendant**
 - Easy adjustment monopoint canopy and LEDme™ socket set with 4 inch adjustability included with MP models




The streamlined contours of Quest make for a striking art piece all the while maintaining its powerful LED lumen performance.

QUEST

Mounting Options	Model	Finish – Pendant/Adapter	Input (power)	Output (light)	Color Temp
MP*	Canopy	BN/BN	4.5 watts	200 lumens	3000K
QP	SOLORAIL™	BN/CH			
	DUORAIL™	BN/DB			

LEDs included. MP models include canopy and 72" braided wire. *Only available in BN/BN. QP models include QUICK CONNECT™ socket set and 72" braided wire.

Example Order: **MP-LED314-BN/BN** or **QPLED314-BN/CH**



- **For use with WAC's 500 series glass shades**
 - (see chart below)
- **Dimming from 100% to 15% or better**
 - Optimal dimming with Electronic Low Voltage (ELV) dimmer
 - Dimming for SOLORAIL™/DUORAIL™ is recommended with electronic transformer
- **Energy efficient LEDs**
 - For optimal performance and color consistency we only use ANSI Compliant Warm/Neutral LED Bins from top manufacturers including Cree®, Philips Lumileds and Nichia
- **30,000 hour potential life**
- **Aluminum construction with acrylic diffuser**
 - Brushed Nickel, Chrome and Dark Bronze finishes
- **Strong light output with no projected heat**
 - Input - 5 watts
 - Output - 230 lumens
 - Color Temp - 3500K



ORDERING INSTRUCTIONS

Mounting Options	Glass - Finish	Socket Set Finish
MP-LED Canopy	515-BW	BN Brushed Nickel
QP-LED SOLORAIL™		CH Chrome
DUORAIL™		DB Dark Bronze

LEDs included. MP models include canopy and 72" braided wire. QP models include QUICK CONNECT™ adapter and 72" braided wire.

Example Order: **MP-LED515-BW/BN**

500 Series QUICK CONNECT™ Pendants (refer to our 25th Anniversary Catalog for complete information on 500 series glass)



LA VIE COLLECTION



profile view




Gorgeous hand blown cased art glass from the Pacific Northwest, the Misticá pendants are resplendent in the rich swirling tones of blues, greens, reds and oranges for a truly vibrant mix of deeply saturated colors. Bring to life any indoor space with the calming flow of patterns for a wonderfully soothing lighting experience.

MISTICÁ

Mounting Options	Model	Finish		Lamp – Xenon Bi-pin		
		Glass	Socket Set	Wattage	Voltage	
MP Canopy	962	BF Blue Flame	BN Brushed Nickel	50W	12V	
QP All QUICK CONNECT™ systems		RF Red Flame	CH Chrome			
			DB Dark Bronze			

Lamp included. MP models include canopy and 72" braided wire. QP models include QUICK CONNECT™ socket set and 72" braided wire. Random bubbles are part of this art glass making process.

Example Order: **MP-962-BF/BN** or **QP962-BF/BN**



QUICK CONNECT™ Pendants



BR



RD



BL

Lava Sconce



WS61-G620BR-BN



WS61-G620RD-BN



WS61-G620BL-BN


The Lava family of hand blown cased art glass enjoys a striking blend of multiple colored frits and the unique contours of individually hand shaped forms. The organic flow of color and variable texture makes each piece one of a kind and brings an exciting look to nearly any space.

LAVA

Mounting Options	Model	Finish		Lamp – Halogen Bi-pin	
		Glass	Socket Set	Wattage	Voltage
MP Canopy	620	BL Blue	BN Brushed Nickel	50W	12V
QP All QUICK CONNECT™ systems		BR Brown	CH Chrome		
		RD Red	DB Dark Bronze		

Lamp included. MP models include canopy and 72" braided wire.
QP models include QUICK CONNECT™ socket set and 72" braided wire.

Example Order: **MP-620-BL/BN** or **QP620-BL/BN**





MR



DIC



GL

Micha Sconce



WS52-G559DIC-BN



WS52-G559MR-CH



WS52-G559GL-BN


Hand crafted from hundreds of individual pieces of crushed glass, the new Shine Collection glimmers with light in individually unique patterns and textures. Whether a sparkling, star lit sky, a warm summers sun or the frost of an early winters morning, the Micha family of shades brings the comforting warmth of nature into your home.

MICHA

Mounting Options	Model	Finish		Lamp – Halogen Bi-pin	
		Glass	Socket Set	Wattage	Voltage
MP Canopy	559	DIC Dichroic	BN Brushed Nickel	50W	12V
QP All QUICK CONNECT™ systems		GL Gold	CH Chrome		
		MR Mirror	DB Dark Bronze		

Lamp included. MP models include canopy and 72" braided wire. QP models include QUICK CONNECT™ socket set and 72" braided wire.

Example Order: **MP-559-DIC/BN** or **QP559-DIC/BN**



KOSMISK COLLECTION

QUICK CONNECT™ Pendants

The white Rhea is hand blown cased glass with a soda dip resulting in a unique air bubble effect, giving the glass a textured look with a smooth, glossy surface.

The blue and umber Rhea are hand blown cased glass, textured and mottled with various size and color frits, incorporating lightly saturated hues and subtle textures.



WT



BL



UM

Rhea Sconce



WS52-G599WT-BN



WS52-G599BL-CH




WS52-G599UM-BN

RHEA

Mounting Options	Model	Finish			Lamp – Halogen Bi-pin	
		Glass	Socket Set		Wattage	Voltage
MP Canopy	599	BL Blue	BN Brushed Nickel	50W	12V	
QP All QUICK CONNECT™ systems		UM UMBER	CH Chrome			
		WT White	DB Dark Bronze			

Lamp included. MP models include canopy and 72" braided wire. QP models include QUICK CONNECT™ socket set and 72" braided wire. Random bubbles are part of this art glass making process.

Example Order: **MP-599-BL/BN** or **QP599-BL/BN**



Stadt, a spun metal spherical shade, is a modern pendant rooted in the minimalist look of many of today's contemporary appliances and fixtures.



BN




CH

STADT


Mounting Options	Model	Finish			Lamp – Xenon Bi-pin	
		Shade	Socket Set		Wattage	Voltage
MP Canopy	953	CH Chrome	BN Brushed Nickel	50W	12V	
QP All QUICK CONNECT™ systems		BN Brushed Nickel	CH Chrome			
			DB Dark Bronze			

Lamp included. MP models include canopy and 72" braided wire. QP models include QUICK CONNECT™ socket set and 72" braided wire.

Example Order: **MP-953-CH/CH** or **QP599-CH/CH**



Crafted in hand blown cased glass, the newest addition to the WAC pendant collection is truly enticing. When lit, the warm glow that emanates reveals a subtle optic twist. However, it's in the off stage that the Yü's potential is fully realized. After mere minutes of charging with the light on, the glass takes on a whole new appearance in the dark, glowing in a rich blue green. This pendant is a true conversation piece.

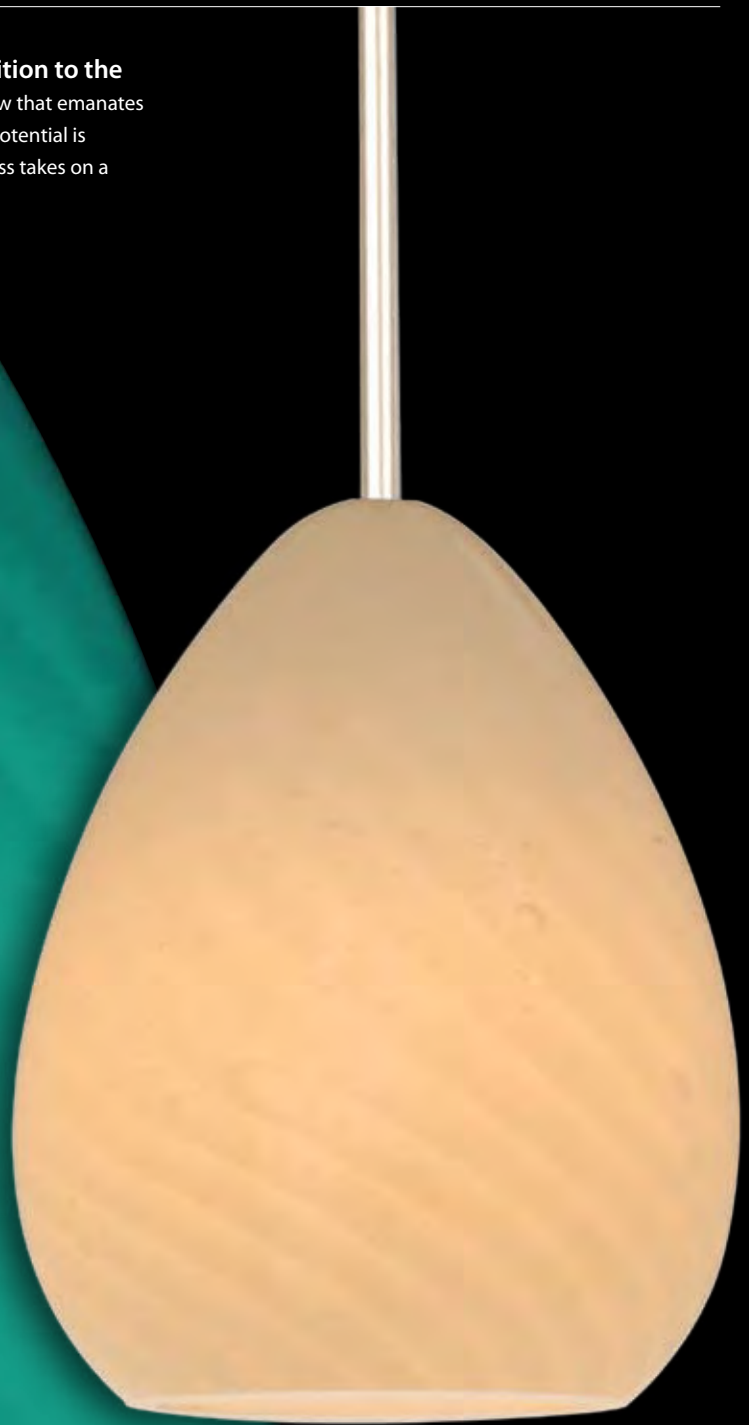


YÜ

Mounting Options	Model	Finish		Lamp – Xenon Bi-pin	
		Glass	Socket Set	Wattage	Voltage
MP Canopy	963	GJ Glow Jade	BN Brushed Nickel	50W	12V
QP All QUICK CONNECT™ systems			CH Chrome		
			DB Dark Bronze		

Lamp included. MP models include canopy and 72" braided wire. QP models include QUICK CONNECT™ socket set and 72" braided wire. Random bubbles are part of this art glass making process.

Example Order: **MP-963-GJ/BN** or **QP963-GJ/BN**



Charges with the light on in minutes and stays glowing with light off for up to 6 hours.

DECORATIVE WALL SCONCES

energy efficient

Derived from some of your favorite styles of QUICK CONNECT™ glass pendants, our new line of energy efficient CFL or incandescent wall sconces bring life to any commercial or residential space. These hand blown cased glass shades will accentuate nearly any décor with unique or classic styles.

FLAVA-BW



Energy efficient compact fluorescent lamping option

- See bottom of page for back plate info


High power factor electronic ballast

Shallow, low profile back plates

- Allows glass shade to sit flush against wall, with no visible backing
- Complies with ADA federal regulations requiring that fixtures in public pathways extend no more than 4 inches from the wall



Flava pendant
QP936-BW



SCONCE SHADE

Model	Color
G-WS413 AURORA YR	Yellow/Red
G-WS414 TIGRA AM	Amber
G-WS415 FLAVA AM	Amber
G-WS415 FLAVA BW	Black/White

Order back plate separately (see below).

Example Order: **G-WS413-YR**



FLAVA-AM



Flava pendant
QP936-AM



AURORA



Aurora pendant
QP918-YR



TIGRA




Tigra pendant
QP918-AM

WILLIAMSBURG



Williamsburg pendant

- PLD-483-IV Canopy
- HM1-483-IV FLEXRAIL™
- HTK-483-IV 120V H Track
- LTK-483-IV 120V L Track
- JTK-483-IV 120V J Track



SCONCE SHADE

Model	Color
G-WS410 WILLIAMSBURG IV	Ivory

Order back plate separately (see table at right).

Model Shown: **G-WS410-IV**

CFL



Incandescent



SCONCE BACK PLATE

Model	Color	Lamp
CFL WS-INC60	WT White	Tri-Tube GX24q 60W max
Incandescent WS-CFL32	WT White	120V T10 26W/32W

Order lamp separately.




INVISILED™ CLASSIC 24V Outdoor

WAC Lighting introduces the newest addition to our INVISILED™ tape light line of products, INVISILED™ CLASSIC 24V Outdoor. This outdoor system provides flexible, easy-to-install accent lighting solutions for a broad range of applications. Versatile and adaptable, this system is ideal for numerous outdoor applications such as decks, steps, ponds, fountains, pools, architectural accents, and landscapes. INVISILED™ CLASSIC 24V Outdoor incorporates the latest energy efficient LED technology into a water sealed silicon cased tape, while still delivering crisp, quality light and effortless navigation of curves.



- **Tape sections are IP-68 rated**
 - Allows for submersion up to five feet
- **Power supply is UL listed for wet locations**
- **Low profile 1/2" W x 1/8" H**
- **Four mounting options for many outdoor applications**
- **Bright, low voltage, energy efficient, LED outdoor tape light**
- **Available in 5 colors**
 - Amber, Blue, Green, Red and White
- **Comes in 1ft, 5ft and 10ft sections**
- **May be cut to length every 2" or at the end of every run**
- **Minimum run length of 1' and maximum of 40'**
- **50,000 hour potential life**

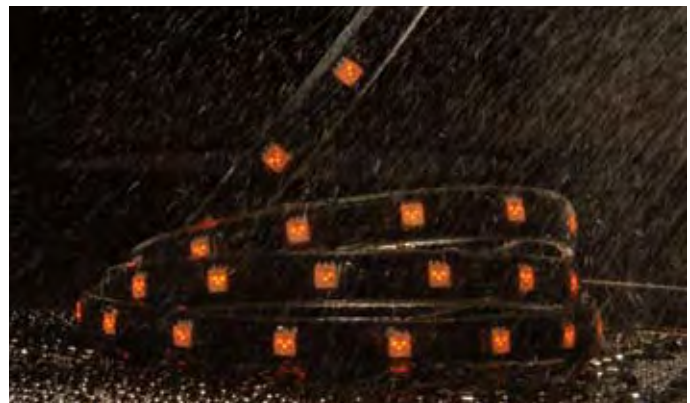

INVISILED™ CLASSIC 24V Outdoor



INVISILED™ CLASSIC 24V OUTDOOR SECTIONS

Model	Length	Watt	Color	Color Temp	Lm/ft
LED-TO24-1	1 foot	2W	AM Amber	590-595nm	22
LED-TO24-5	5 feet	10W	BL Blue	465-470nm	20
LED-TO24-10	10 feet	20W	GR Green	515-520nm	60
			RD Red	625-630nm	35
			WT White	3700K	90

Minimum run of 1' and a maximum run of 40'.

Example Order: **LED-TO24-1-RD**



OUTDOOR REMOTE POWER SUPPLY

EN-O24100-RB2-T	Input	120V
100W	Output	24V
Length	6 ft	

Supplies power with hard wiring. A 6' long lead wire is included. Minimum load requirement of 1W for consistent operation.



JOINER CABLE

LED-TO24-IC6	6"
LED-TO24-IC12	12"
LED-TO24-IC72	72"
LED-TO24-IC120	120"

Connects two sections of INVISILED™ Outdoor.



3-WAY "Y" CONNECTOR

LED-TO24-Y	4 3/4"L x 4 3/4"W x 3/4"H
-------------------	---------------------------

Y connector has one male and two female connectors and can be used to easily customize your design layout.



END CAP

LED-TO24-EC	5/8"L x 5/8"W x 5/8"H
--------------------	-----------------------

Use to terminate every run to protect against contaminants. Seal cut end with silicon after adding end cap.



4-WAY "X" CONNECTOR

LED-TO24-X	6 1/8"L x 6 3/8"W x 3/4"H
-------------------	---------------------------

X connector has one male and three female connectors and can be used to easily customize your design layout.



MOUNTING CLIP 1

LED-TO24-C1	1 1/8"L x 3/8"W x 1/4"H
--------------------	-------------------------

Qty 10
For installation on non-flat surfaces where there is no edge contact. Two mounting clips per foot are recommended for straight runs.

(see p.23 for more detailed descriptions)



MOUNTING CLIP 2

LED-TO24-C2	3/4"L x 3/8"W x 1/4"H
--------------------	-----------------------

Qty 10
For installation on non-flat surfaces, allows for contact on one edge. Two mounting clips per foot are recommended for straight runs.

(see p.23 for more detailed descriptions)



MOUNTING CLIP 3

LED-TO24-C3	5/8"L x 5/8"W x 5/8"H
--------------------	-----------------------

Qty 10
For installation on non-flat surfaces, allows for contact on both edges. Two mounting clips per foot are recommended for straight runs.

(see p.23 for more detailed descriptions)



RETROFIT CHANNEL

LED-TO24-CH1	12"L x 5/8"W x 1/4"H
LED-TO24-CH5	60"L x 5/8"W x 1/4"H


Rigid, non-flexible channel for mounting to a straight, solid surface.

(see p.23 for more detailed descriptions)

LAYING OUT	Determine the necessary quantities of 1 foot, 5 foot and 10 foot sections that are needed. Determine the number of separately powered runs needed. How many power supplies are needed? Requires a minimum run length of 1 foot and is limited to a maximum run of 40 feet per 100W Class 2 power supply.
POWER	Easy to install by simply powering the power supply and connecting the male and female sections and connectors creating straight lines, any angled turns, or lengthwise curves. Use end caps with silicon for a water tight seal at the end of each run.
MOUNTING	Four mounting options available for wood, concrete and many other outdoor applications <i>(see next page for details on different mounting options).</i>
JOINING SECTIONS	Choose the needed connectors to achieve your desired effect. Joiner cables can also be used for carrying power between sections of a run and creating connections at any angle. May be cut to length every 2" (see indicated markings on back of INVISILED™ section) or at the end of every run (cut sections may not be rejoined to start a new section and must be sealed with silicon after adding end cap). Assistance is only a phone call away. Please call WAC to speak to a friendly technical support specialist. Call 800.526.2588

INVISILED™ sample layout


A	EN-O24100-RB2-T	Remote power supply
B	LED-TO24-1	1 foot tape section
C	LED-TO24-EC	End cap
D	LED-TO24-X	X connector
E	LED-TO24-10	10 foot tape section
F	LED-TO24-Y	Y connector
G	LED-TO24-5	5 foot tape section

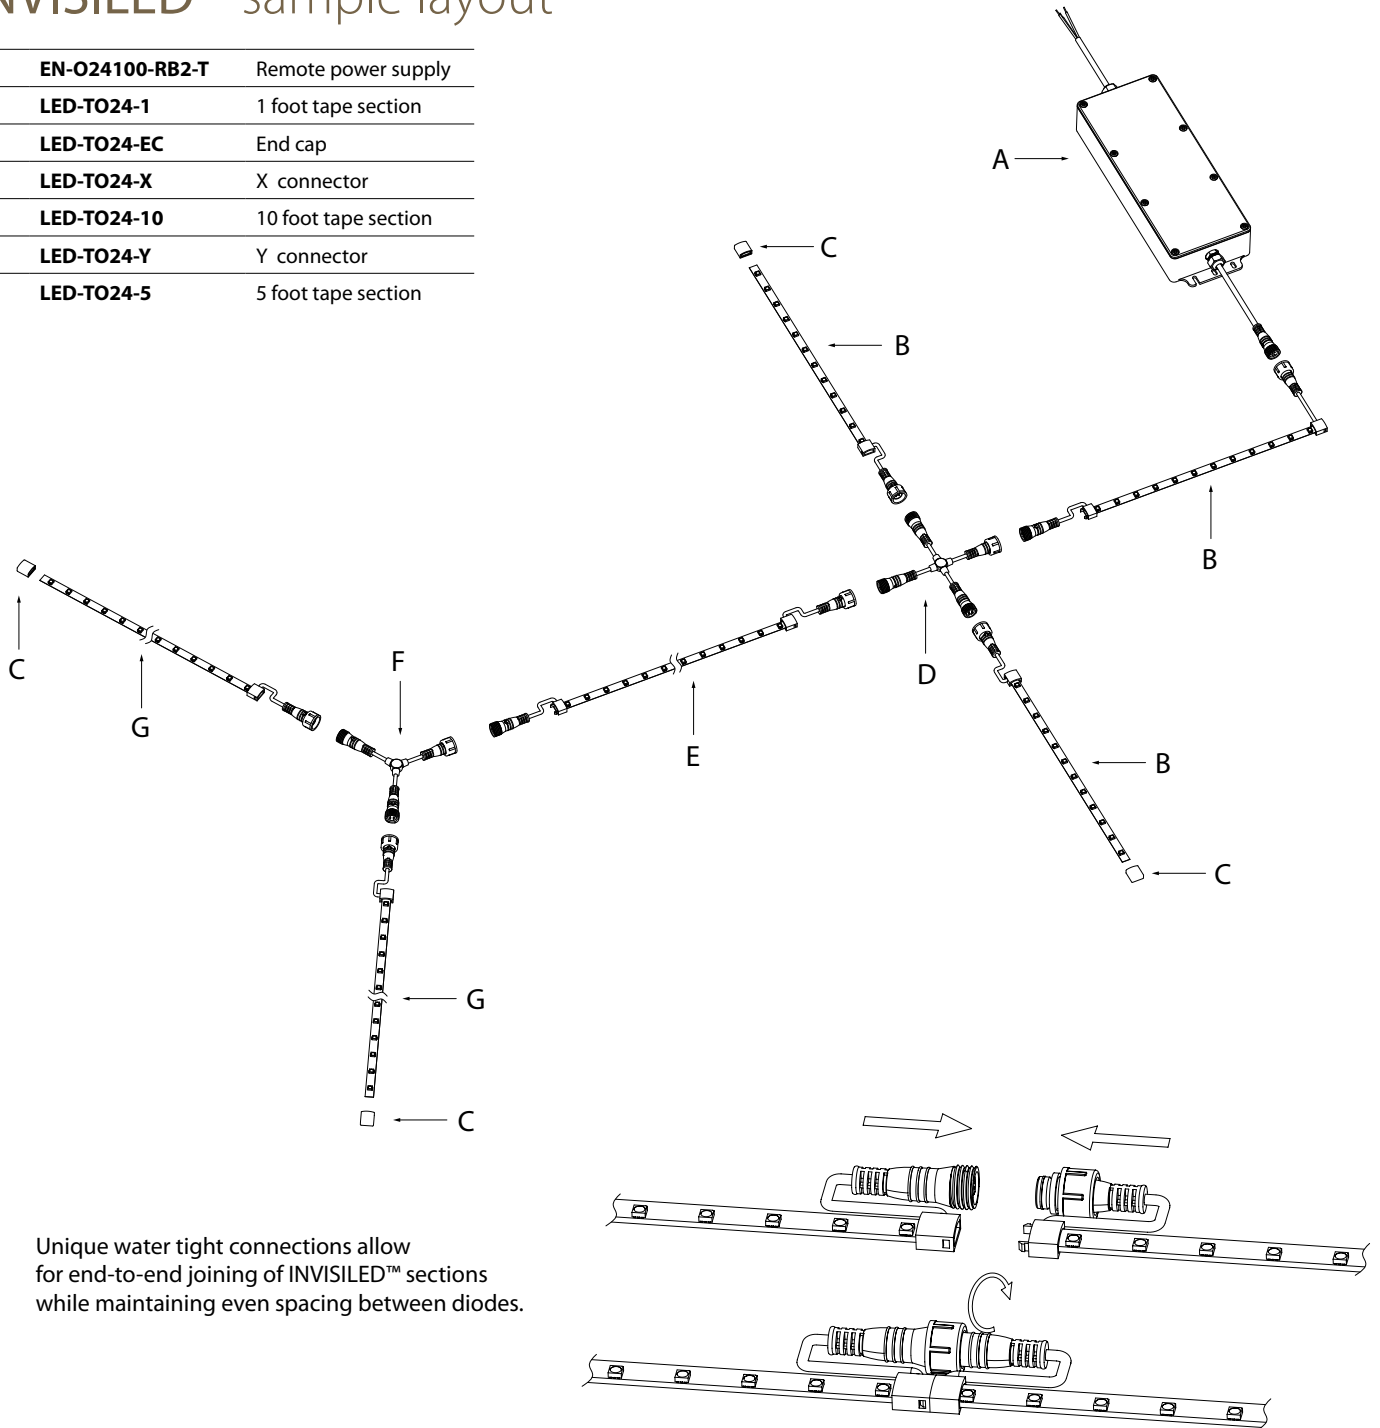

Unique water tight connections allow for end-to-end joining of INVISILED™ sections while maintaining even spacing between diodes.


LED-TO24-CH1

For use on flat surfaces allowing for contact on both edges, such as small recesses or coves. Channel is not flexible. Simply screw channel to surface and easily snap INVISILED™ into place.

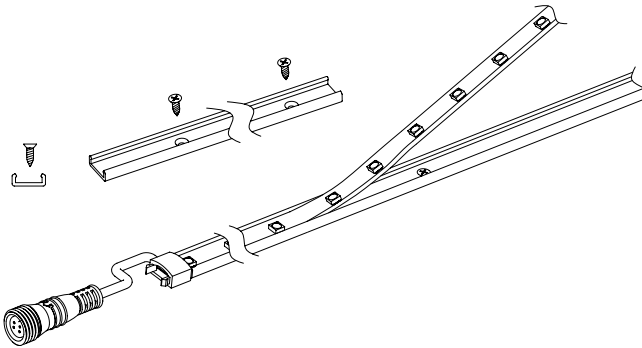


LED-TO24-C1

For use on non-flat surfaces where there is no edge contact, such as curved or irregular walls. Clips are secured over INVISILED™ section by two screws. Two clips per foot are recommended for straight runs, additional clips may be necessary for securing sections near a connection.

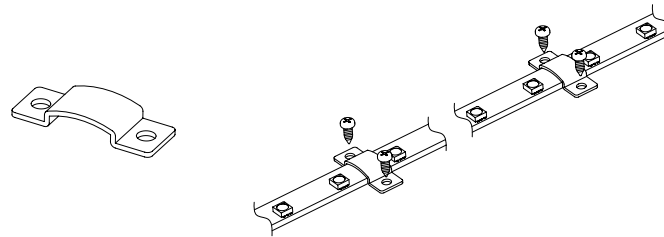


LED-TO24-C2

For use on non-flat surfaces allowing for contact on one edge, such as wooden or concrete stairs. Clips are secured over INVISILED™ section using one screw. Two clips per foot are recommended for straight runs, additional clips may be necessary for securing sections near a connection.

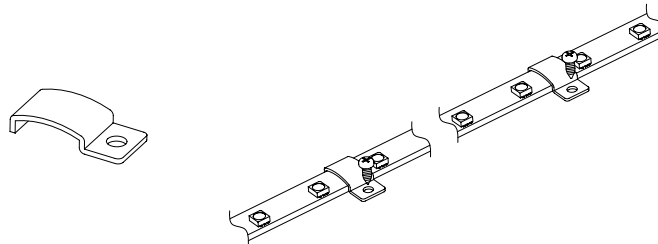

LED-TO24-C3

For use on non-flat surfaces allowing for contact on both edges, such as curved or irregular recesses or coves. Simply screw clips into surface and easily snap INVISILED™ into place. Two clips per foot are recommended for straight runs, additional clips may be necessary for securing sections near a connection.

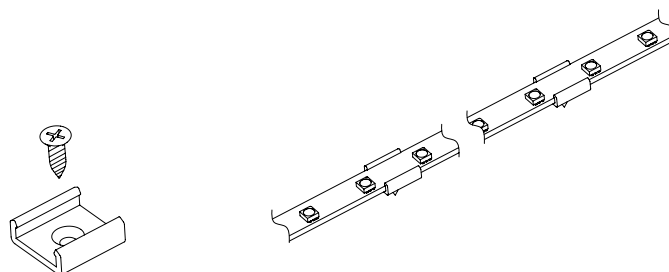



All WAC Lighting products come with a 5 year warranty

Corporate Headquarters:
615 South Street
Garden City, NY 11530

West Coast Office:
168 Brea Canyon Road
City of Industry, CA 91789

Dallas Trade Mart Showroom #3934
2500 Market Center Blvd.
Dallas, TX 75207

waclighting.com
Tel: 800.526.2588
Fax: 800.526.2585