



MAXIM  LIGHTING®

JUNE 2010 SUPPLEMENT

TABLE OF CONTENTS

Angle	38
Arc CF	70
Arc ES	69
Aurora ES	43
Balboa VX ES	73
Beam ES	45
Conical	33
Cubic	36
Cylinder	34
Discus	31
Elle	35
Essence	39
Essentials ES	40
Finesse	23
Lake Shore VX ES	75
Lola	37
Malibu ES	41
Meridian	5
Mondrian	1
Nexus	27
Orion	9
Pacific Heights VX ES	77
Passion	13
Rondo	19
StarStrand Aqua Star 24	55
StarStrand Basic Star	65
StarStrand Channel Star 24	61
StarStrand Elite Star 24	53
StarStrand Rainbow Aqua Star 24	59
StarStrand Rainbow Channel Star 24	63
StarStrand Rainbow Star 24	57
StarStrand Ultima Star 24	51
Westport VXES	71
Whisper Dark Sky ES	79
Zenith ES	47

800.486.2946

maximlighting.com



Mondrian

Mondrian, a Mediterranean inspired collection, features a forged-iron frame finished in Umber Bronze. The warm glow emitted through the delicate pattern of the metal silhouette gently radiates through the Wheat fabric shades to create an interesting lighting effect.

21156WHUB 9-Light Chandelier
Umber Bronze
34"W x 36.5"H
9 x 60w CA Bulbs



800.486.2946

maximlighting.com



21155WHUB 5-Light Chandelier
Umber Bronze
28"W x 27"H
5 x 60w CA Bulbs

21153WHUB 3-Light Chandelier
 Umber Bronze
 24.5"W x 23.5"H
 3 x 60w CA Bulbs



21151WHUB 2-Light Flush Mount
 Umber Bronze
 14.25"W x 7"H
 2 x 75w MB Bulbs



91150WHUB 1-Light Mini Pendant
 Umber Bronze
 7.5"W x 13"H x 55"OAH
 1 x 100w MB Bulb
*Additional stems available:
 6" order STR06206UB
 12" order STR06212UB
 One 6" stem and three 12"
 stems included.*





21152WHUB
 1-Light Wall Sconce
 Umber Bronze
 7"W x 12"H x 10.5"Ext.
 1 x 60w CABulb



21159WHUB
 4-Light Entry Foyer Pendant
 Umber Bronze
 25"W x 49"H
 4 x 100w MB Bulbs



21158WHUB
 3-Light Entry Foyer Pendant
 Umber Bronze
 21"W x 44"H
 3 x 100w MB Bulbs

Meridian


Multiple-sized rings artfully welded to one another form modern sculptures in the Meridian collection. The Dusty White inner glass shades add a perfect contrast to the darker metal finished in a mottled Umber Bronze.

21346DWUB 9-Light Chandelier
Umber Bronze
40"W x 39"H
9 x 60w G9 T4 Bulbs (Included)





21344DWUB 4-Light Pendant
Umber Bronze
30"W x 35"H
4 x 100w MB Bulbs

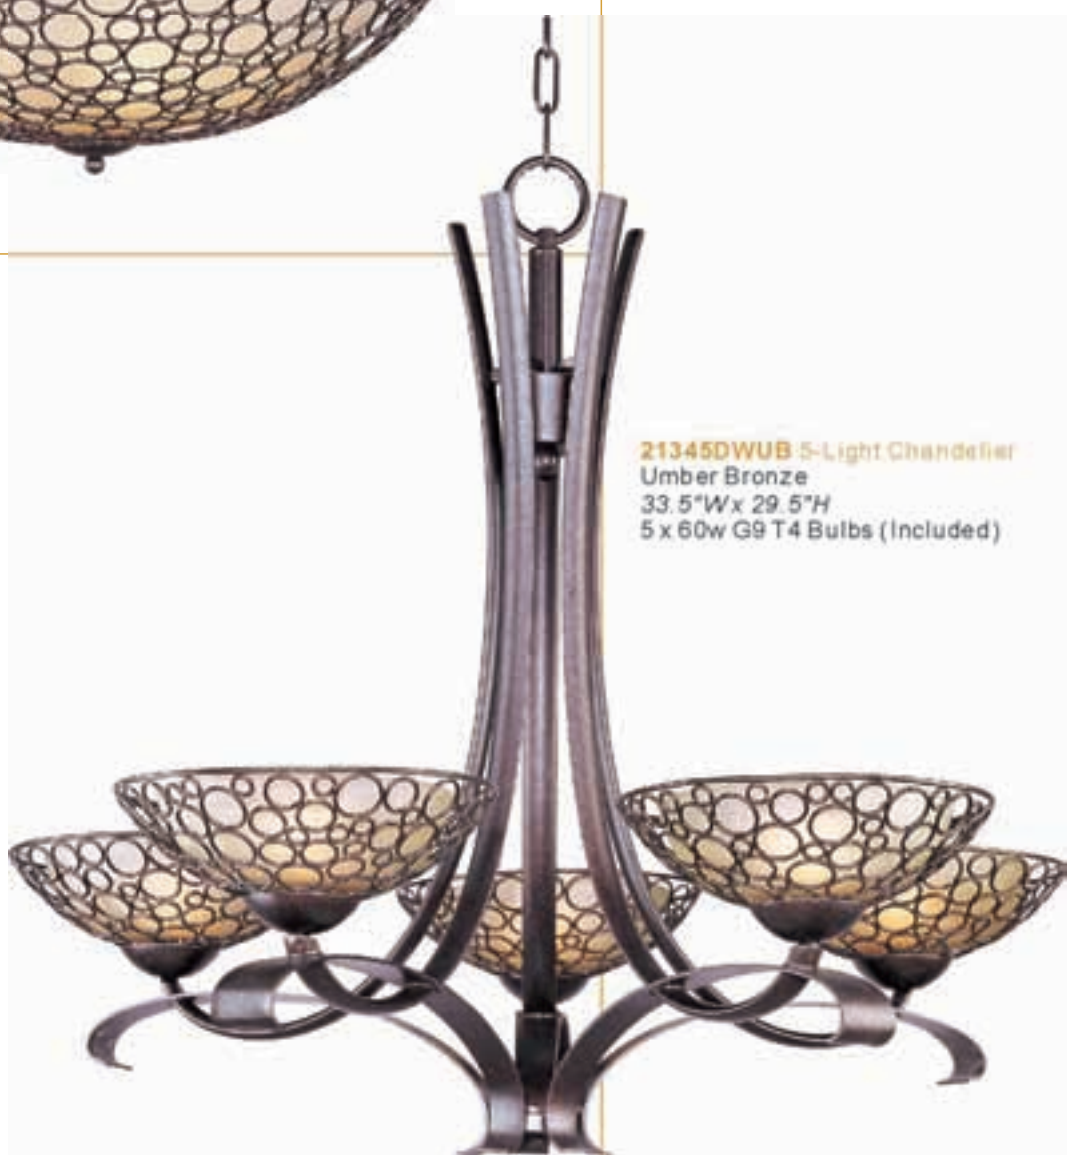

21345DWUB 5-Light Chandelier
Umber Bronze
33.5"W x 29.5"H
5 x 60w G9 T4 Bulbs (Included)



21348DWUB 1-Light Wall Sconce
Umber Bronze
8"W x 17"H x 9.75"Ext.
1 x 60w G9 T4 Bulb (Included)



21343DWUB
3-Light Chandelier
Umber Bronze
23"W x 23"H
3 x 60w G9 T4 Bulbs (Included)



21340DWUB 1-Light Flush Mount
Umber Bronze
16.5"W x 8.5"H
1 x 100w MB Bulb



21347DWUB 2-Light Pendant
Umber Bronze
24.5"W x 14.5"H x 56.5"OAH
2 x 100w MB Bulbs
Additional stems available:
6" order STR06206UB
12" order STR06212UB
One 6" stem and three 12"
stems included.



91340DWUB
1-Light Mini Pendant
Umber Bronze
7"W x 22"H x 55"OAH
1 x 100w MB Bulb
Additional stems available:
6" order STR06206UB
12" order STR06212UB
One 6" stem and three 12"
stems included.



Orion

Orion collection's sweeping Satin Nickel oval-shaped arms add stark contrast to the charcoal-colored, sheer fabric shades with Satin White interior glass.

This contemporary collection works well in **both modern and transitional interiors.**



23036SWSN 9-Light Chandelier
Satin Nickel
35"W x 33.25"H
9 x 60w CABulbs



23035SWSN 5-Light Chandelier
Satin Nickel
29"W x 26.5"H
5 x 60w CA Bulbs



23031SWSN 3-Light Flush Mount
Satin Nickel
15"W x 7"H
3 x 60w MB Bulbs



23039SWSN 4-Light Island Pendant
Satin Nickel
41.5"L x 6.5"W x 25.5"H x 54.5"OAH
4 x 60w CABulbs
Two 6" stems and six 12" stems included
Additional stems available:
6" stem order - STR06208SN
12" stem order - STR06212SN





23038SWSN 1-Light Wall Sconce
Satin Nickel
6.5"W x 11.5"H x 9"Ext.
1 x 60w CA Bulb



23033SWSN 4-Light Pendant
Satin Nickel
22.5"W x 28"H
4 x 100w MB Bulbs



93031SWSN 1-Light Mini Pendant
Satin Nickel
8"W x 10"H x 52"OAH
1 x 100w MB Bulb
*Additional stems available:
6" order STR06206SN
12" order STR06212SN
One 6"stem and three 12"
stems included.*



Passion

The ultimate in luxury lighting, the Passion Collection features a laser-cut metal frame in a mirror-like Plated Silver finish. The sculpture is accented with hand-formed bent and beveled crystal arms, adding graceful elegance to these exquisite fixtures. Beveled crystal columns, bobeches, and trim showcase acute attention to every detail in these works of art.

39987BCPS 16-Light Chandelier
Plated Silver
47"W x 48.5"H
16 x 60w CA Bulbs



800.486.2946

maximlighting.com

39986BCPS 9-Light Chandelier
Plated Silver
36.5"W x 37.5"H
9 x 60w CA Bulbs



39985BCPS 5-Light Chandelier
Plated Silver
28"W x 27"H
5 x 60w CA Bulbs





39984BCPS 6-Light Pendant
Plated Silver
25.5"W x 36"H
6 x 60w CA Bulbs



39982BCPS 4-Light Pendant
Plated Silver
16"W x 21.5"H
4 x 60w CA Bulbs



39983BCPS 3-Light Chandelier
Plated Silver
19"W x 21"H
3 x 60w CA Bulbs



39981BCPS 4-Light Semi-Flush
Plated Silver
15"W x 16"H
4 x 60w CA Bulbs



39989BCPS
2-Light Wall Sconce
Plated Silver
15.25"W x 21.25"H x 8.5"Ext.
2 x 60w CA Bulbs

Rondo

The Rondo Collection cool, clean, and contemporary. Rectangular arms are bent to form graceful curves and are finished in Polished Nickel. Smooth crystal balls soften the sharp frame, and White fabric shades fit with white diffusers evenly light the room.



12758WTPN 8-Light Chandelier
Polished Nickel
38.75"W x 23.5"H
8 x 60w CA Bulbs

12755WTPN 5-Light Chandelier
 Polished Nickel
 31"W x 21.25"H
 5 x 60w CA Bulbs



12759WTPN 4-Light Island Pendant
 Polished Nickel
 42.75"L x 7.5"W x 28"H x 54" OAH
 4 x 60w CA Bulbs
*Two 6" stems and
 six 12" stems included
 Additional stems available:
 6" stem order- STR06206PN
 12" stem order- STR06212PN*




120°

12753WTPN 4-Light Pendant
 Polished Nickel
 22.25"W x 24"H
 4 x 100w MB Bulbs



92750WTPN
 1-Light Mini Pendant
 Polished Nickel
 8.5"W
 1 x 60w CAB Bulb
 Additional stems available:
 6" order STR06206PN
 12" order STR06212PN
 One 6" stem and three 12"
 stems included.

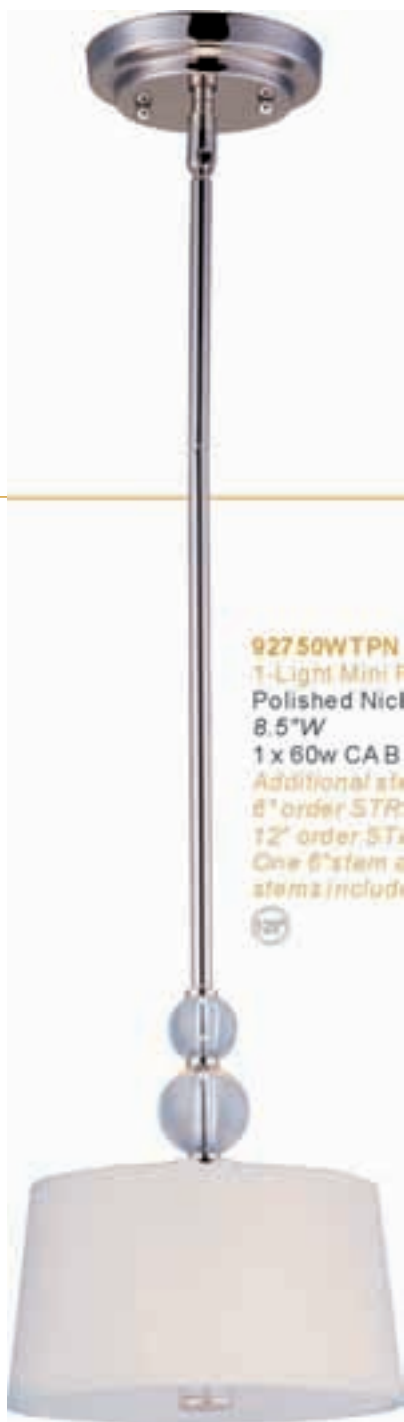

12751WTPN 3-Light Flush Mount
 Polished Nickel
 15"W x 7.25"H
 3 x 60w MB Bulbs



12762WTPN
2-Light Bath Vanity
Polished Nickel
16.75"W x 8.25"H x 7.75"Ext.
2 x 60w CABulbs



12761WTPN 1-Light Wall Sconce
Polished Nickel
6.5"W x 8.5"H x 7.5"Ext.
1 x 60w CABulb



12763WTPN
3-Light Bath Vanity
Polished Nickel
26.25"W x 8.25"H x 7.75"Ext.
3 x 60w CABulbs




12764WTPN
4-Light Bath Vanity
Polished Nickel
36.25"W x 8.25"H x 7.75"Ext.
4 x 60w CABulbs

Finesse

The classic Finesse Collection features sweeping oval tube arms that transition to sculptured fonts. The pleated glass shade in Dusty White or Frosted shed a warm diffused light. The body is finished in Satin Nickel or Oil Rubbed Bronze.



21505 DWOI,FTSN 5-Light Chandelier
25.5"W x 24.25"H
5 x 60w CA Bulbs

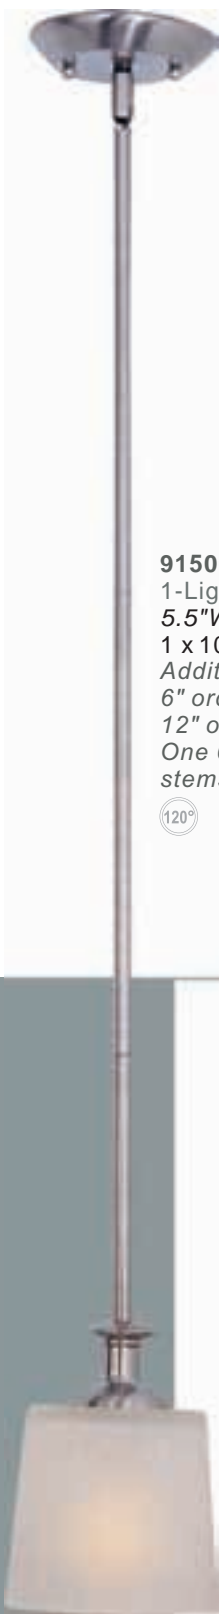

91500 DWOI,FTSN
 1-Light Mini Pendant
 5.5"W
 1 x 100w MB Bulb
*Additional stems available:
 6" order STR06206OI, SN
 12" order STR06212OI, SN
 One 6"stem and three 12"
 stems included*



21507 DWOI,FTSN
 1-Light Wall Sconce
 5.5"W x 10"H x 6.75"Ext.
 1 x 60w CABulb



21504 DWOI,FTSN
 3-Light Chandelier
 18.5"Wx 19.75"H
 3 x 60w CABulbs



21500 DWOI,FTSN
 3-Light Flush Mount
 13.25"W x 5"H
 3 x 60w MB Bulbs



21501 DWOI,FTSN
 3-Light Semi-Flush
 13.25"W x 9"H
 3 x 60w MB Bulbs



21503 DWOI,FTSN
 4-Light Pendant
 18"W x 24.25"H
 4 x 100w MB Bulbs



21511 DWOI,FTSN
 1-Light Bath Vanity
 5.5"W x 8.5"H x 7"Ext.
 1 x 60w G9 T4 Bulb (Included)



21512 DWOI,FTSN
 2-Light Bath Vanity
 14"W x 8.75"H x 7"Ext.
 2 x 60w G9 T4 Bulbs (Included)



21513 DWOI,FTSN
 3-Light Bath Vanity
 22"W x 8.75"H x 7"Ext.
 3 x 60w G9 T4 Bulbs (Included)



21514 DWOI,FTSN
 4-Light Bath Vanity
 32"W x 8.75"H x 7"Ext.
 4 x 60w G9 T4 Bulbs (Included)

Nexus

The Nexus Collection is the true standard for contemporary lighting. The flat rectangular tube arm forms to a perfect angle and comes finished in choice of Satin Nickel or Oil Rubbed bronze. The White fabric drum shade is trimmed with metal rings in matching finish for a clean, tailored look.



12057 WTOI, WTSN 6-Light Chandelier
39.25"L x 21.25"W x 11.75"H
6 x 60w CA Bulbs



12055 WTOI, WTSN 5-Light Chandelier
27.75"W x 22.75"H
5 x 60w CA Bulbs

12059 WTOI,WTSN 1-Light Wall Sconce
6"W x 9.75"H x 7.5"Ext.
1 x 60w CA Bulb



12054 WTOI,WTSN 3-Light Chandelier
21"W x 19.25"H
3 x 60w CA Bulbs



12050 WTOI, WTSN
 3-Light Flush Mount
 17.5"W x 8.75"H
 3 x 60w MB Bulbs



12053 WTOI, WTSN
 4-Light Pendant
 22"W x 24.5"H
 4 x 100w MB Bulbs

Discus

The contemporary Discus Collection melds a soft delicate oval tube arm with the boldness of a heavy glass shade. The Frost glass shade features a clear reveal on the bottom and is illuminated with xenon for a true, natural light. The fixtures are available in both Satin Nickel and Oil Rubbed Bronze to fit many room décors.

Additional Stems

- 6" order STR06206OI, SN
- 12" order STR06212OI, SN

22164 FTOI, FTSN 3-Light Chandelier
19"W x 24.75"H
3 x 60w G9 T4 Bulbs (Included)
One 6" stem and three 12" stems included.



22165 FTOI, FTSN 5-Light Chandelier
25"W x 26.25"H
5 x 60w G9 T4 Bulbs (Included)
One 6" stem and three 12" stems included.





92160 FTOI,FTSN
 1-Light Mini Pendant
 6"W
 1 x 60w G9 T4 Bulb (Included)
 One 6"stem and three 12"
 stems included.



22169 FTOI,FTSN
 1-Light Wall Sconce
 5"W x 6.25"H x 6.25"Ext.
 1 x 60w G9 T4 Bulb (Included)



22168 FTOI,FTSN
 4-Light Island Pendant
 41"W x 16.25"H
 4 x 60w G9 T4 Bulbs (Included)
 Two 6"stems and six 12"
 stems included.



Conical

Conical collection's Satin White cone-shaped glass is supported by a sweeping rectangular tube arm finished in either Polished Chrome or Oil Rubbed Bronze. This interesting marriage between contemporary geometric shape and traditional styling is a unique addition to any bathroom.



9011 SWOI,SWPC
1-Light Bath Vanity
4.25"W x 6.5"H x 6.25"Ext.
1 x 100w MB Bulb



9012 SWOI,SWPC
2-Light Bath Vanity
13"W x 6.5"H x 6.25"Ext.
2 x 100w MB Bulbs



9013 SWOI,SWPC 3-Light Bath Vanity
19"W x 6.5"H x 6.25"Ext.
3 x 100w MB Bulbs



9014 SWOI,SWPC 4-Light Bath Vanity
26.25"W x 6.5"H x 6.25"Ext.
4 x 100w MB Bulbs

Cylinder

Cylinder, a classic bath collection, features cylindrical Satin White glass shades supported on stepped round cups mounted to an oval shaped frame finished in your choice of Satin Nickel or Oil Rubbed Bronze.



9051 SWOI, SWSN
1-Light Bath Vanity
4"W x 9.5"H x 5.5"Ext.
1 x 100w MB Bulb



9052 SWOI, SWSN
2-Light Bath Vanity
12.5"W x 9.5"H x 5.25"Ext.
2 x 100w MB Bulbs



9053 SWOI, SWSN
3-Light Bath Vanity
20.5"W x 9.5"H x 5.25"Ext.
3 x 100w MB Bulbs



9054 SWOI, SWSN
4-Light Bath Vanity
29"W x 9.5"H x 5.25"Ext.
4 x 100w MB Bulbs

Elle

Symmetry in design is what the Elle Collection is all about. A graceful, sweeping, rectangular arm supports a bold tapered glass. The Polished Chrome finish and Frosted glass powered by xenon bulbs gives a bright and natural light.



9041FTPC
1-Light Bath Vanity
Polished Chrome
5"W x 6.5"H x 6.25"Ext.
1 x 60w G9 T4 Bulb (Included)



9042FTPC 2-Light Bath Vanity
Polished Chrome
13"W x 5.75"H x 6"Ext.
2 x 60w G9 T4 Bulbs (Included)



9043FTPC 3-Light Bath Vanity
Polished Chrome
20.5"W x 6"H x 6"Ext.
3 x 60w G9 T4 Bulbs (Included)



9044FTPC 4-Light Bath Vanity
Polished Chrome
29"W x 6.25"H x 6"Ext.
4 x 60w G9 T4 Bulbs (Included)

800.486.2946

maximlighting.com

Cubic

Cubic collection's bold Clear crystal cubes are mounted on a solid metal frame finished in a mirror-like Polished Chrome. The inside of the crystal cubes are frosted to nicely diffuse the natural light created from the included xenon bulbs.



10002CLPC 2-Light Bath Vantiy
Polished Chrome
14.5"W x 4.5"H x 5.25"Ext.
2 x 60w G9 T4 Bulbs (Included)



10001CLPC 1-Light Bath Vantiy
Polished Chrome
5.75"W x 4.75"H x 5.75"Ext.
1 x 60w G9 T4 Bulb (Included)



10003CLPC 3-Light Bath Vantiy
Polished Chrome
21.5"W x 4.5"H x 5.25"Ext.
3 x 60w G9 T4 Bulbs (Included)



10004CLPC 4-Light Bath Vantiy
Polished Chrome
29.5"W x 4.5"H x 5.25"Ext.
4 x 60w G9 T4 Bulbs (Included)

Lola

The soft round curves of this design are evident in every detail. The use of xenon allows for a profile that is delicate in scale. The Lola Collection is available in Polished Nickel finish with Satin White glass or Oil Rubbed Bronze finish with Dusty White glass.



9021 DWOI, SWPN
1-Light Bath Vanity
5.5"W x 7"H x 3.75"Ext.
1 x 60w G9 T4 Bulb (Included)



9022 DWOI, SWPN
2-Light Bath Vanity
13.75"W x 7"H x 3.75"Ext.
2 x 60w G9 T4 Bulbs (Included)



9023 DWOI, SWPN 3-Light Bath Vanity
22.25"W x 7"H x 3.75"Ext.
3 x 60w G9 T4 Bulbs (Included)



9024 DWOI, SWPN 4-Light Bath Vanity
30.75"W x 7"H x 3.75"Ext.
4 x 60w G9 T4 Bulbs (Included)

Angle

Rectangular metal tubing mitered to a perfect angle lends a sharp, clean, contemporary look. Angle Collection utilizes xenon lamps for ultimate light output while maintaining a petite scale and low profile. Angle is available in choice of Satin Nickel finish with Satin White glass or Oil Rubbed Bronze finish with Satin White glass.



9031 SWOI, SWSN
1-Light Bath Vanity
6.5"W x 5.75"H x 4"Ext.
1 x 60w G9 T4 Bulb (Included)



9032 SWOI, SWSN 2-Light Bath Vanity
13.5"W x 5.75"H x 4"Ext.
2 x 60w G9 T4 Bulbs (Included)



9033 SWOI, SWSN 3-Light Bath Vanity
21.25"W x 5.75"H x 4"Ext.
3 x 60w G9 T4 Bulbs (Included)



9034 SWOI, SWSN 4-Light Bath Vanity
29.25"W x 5.75"H x 4"Ext.
4 x 60w G9 T4 Bulbs (Included)

Essence

Oval, tubular arms transition to sculptured round fonts on this contemporary Essence bath collection. The oval-shaped glass squares off on the ends and allows for a low profile on the wall, while the xenon lamps shed a nice, natural light. Available in choice of Satin Nickel finish with Satin White glass or Oil Rubbed bronze and Dusty White glass.



9001 DWOI, SWSN
1-Light Bath Vanity
5.25"W x 5.75"H x 4"Ext.
1 x 60w G9 T4 Bulb (Included)



9002 DWOI, SWSN 2-Light Bath Vanity
14.5"W x 6"H x 4"Ext.
2 x 60w G9 T4 Bulbs (Included)



9003 DWOI, SWSN 3-Light Bath Vanity
22.5"W x 6"H x 4"Ext.
3 x 60w G9 T4 Bulbs (Included)



9004 DWOI, SWSN 4-Light Bath Vanity
30.75"W x 6"H x 4"Ext.
4 x 60w G9 T4 Bulbs (Included)

Essentials ES

- Self Ballasted GU24 Bulbs
- 2700 K Color Temperature
- 10,000 Rated Life Hours
- Meets California Title 24 Requirements



85812MRSN 2-Light Bath Vanity
Satin Nickel
18"W x 7"H x 8"Ext.
2 x 13w GU24 Bulbs (Included)
1800 Rated Lumens



85813MRSN 3-Light Bath Vanity
Satin Nickel
24"W x 7"H x 8"Ext.
3 x 13w Gu24 Bulbs (Included)
2700 Rated Lumens



85814MRSN 4-Light Bath Vanity
Satin Nickel
30"W x 7"H x 8"Ext.
4 x 13w GU24 Bulbs (Included)
3600 Rated Lumens



800.486.2946

maximlighting.com

Malibu ES

The Energy Star Malibu ES collection is finished in Stain Nickel completed with Marble glass.

- *Self Ballasted GU24 Bulbs*
- *2700 K Color Temperature*
- *10,000 Rated Life Hours*
- *Meets California Title 24 Requirements*



82699MRSN 5-Light Chandelier
Satin Nickel
25"W x 16"H
5 x 13w GU24 Bulbs (Included)
4000 Rated Lumens





82686MRSN 1-Light Wall Sconce
Satin Nickel
6"W x 6.5"H x 9"Ext.
1 x 13w GU24 Bulb (Included)
800 Rated Lumens



82687MRSN 2-Light Bath Vanity
Satin Nickel
13"W x 6"H x 8"Ext.
2 x 13w GU24 Bulbs (Included)
1600 Rated Lumens



82688MRSN 3-Light Bath Vanity
Satin Nickel
19.5"W x 6"H x 8"Ext.
3 x 13w GU24 Bulbs (Included)
2400 Rated Lumens



82689MRSN 4-Light Bath Vanity
Satin Nickel
29"W x 6"H x 8"Ext.
4 x 13w GU24 Bulbs (Included)
3200 Rated Lumens



Aurora ES

Straight lines and curves make the Energy Star contemporary Aurora ES collection a classic. Square metal tubing finished in Satin Nickel support tapered square Frost glass shades.

- *Self Ballasted GU24 Bulbs*
- *2700 K Color Temperature*
- *10,000 Rated Life Hours*
- *Meets California Title 24 Requirements*



83095FTSN 5-Light Chandelier
Satin Nickel
26"W x 23.5"H
5 x 13w GU24 Bulbs (Included)
4000 Rated Lumens





83098FTSN 1-Light Wall Sconce
Satin Nickel
5.5"W x 10"H x 7"Ext.
1 x 13w GU24 Bulbs (Included)
600 Rated Lumens



83099FTSN 2-Light Wall Sconce
Satin Nickel
13.5"W x 7"H x 8.5"Ext.
2 x 13w GU24 Bulbs (Included)
1600 Rated Lumens



83102FTSN 1-Light Mini Pendant
Satin Nickel
8"W
1 x 13w GU24 Bulbs (Included)
800 Rated Lumens
Additional stems available:
6" order STR06206SN
12" order STR06212SN
One 6" stem and three 12"
stems included.



Beam ES

The Beam Collection features low-profile wall lighting designed with versatility and energy saving technology. Fixtures are constructed of stainless steel to allow for outdoor installation, and with the low-profile design, the Beam Collection can also be used interior for corridors and hallways with ADA compliance. The fluorescent light source saves energy and allows for maintenance-free operation. The White acrylic lens is durable and strong. The metal is finished in either Stainless Steel or Oil Rubbed Bronze.

- 2700 K Color Temperature
- 10,000 Rated Life Hours
- Meets California Title 24 Requirements



86300 WTOI,WTSST
1-Light Wall Sconce
6.75"W x 12"H x 2.25"Ext.
1 x 13w 2GX7 Bulb
840 Rated Lumens



86303 WTOI,WTSST
1-Light Wall Sconce
6.75"W x 16"H x 2.25"Ext.
1 x 18w 2G11 Bulb
1125 Rated Lumens



54340 WTOI,WTSST
1-Light Wall Sconce
6"W x 12"H x 2.25"Ext.
1 x 13w 2GX7 Bulb
840 Rated Lumens





54341 WTOI,WTSST
 1-Light Wall Sconce
 7.5"W x 16"H x 2.75"Ext.
 1 x 18w 2G11 Bulb
 1125 Rated Lumens



54345 WTOI,WTSST
 1-Light Wall Sconce
 6"W x 12"H x 2.25"Ext.
 1 x 13w 2GX7 Bulb
 840 Rated Lumens



54346 WTOI,WTSST
 1-Light Wall Sconce
 7"W x 16"H x 2.75"Ext.
 1 x 18w 2G11 Bulb
 1125 Rated Lumens



Zenith ES

These contemporary, European-designed fluorescent outdoor fixtures are a perfect combination of energy efficiency and durability. The Zenith Collection features die-cast metal frames painted with a polyurethane powder coat, finished in Platinum or Architectural Bronze. The durable white acrylic lens diffuses the light nicely. The fluorescent light source gives the ultimate in energy saving and long life.

- 2700 K Color Temperature
- 10,000 Rated Life Hours
- Meets California Title 24 Requirements



86204 WTABZ,WTPL
1-Light Wall Sconce
10.25"W x 10.25"H x 4"Ext.
1 x 18w G24Q3 Bulb
1125 Rated Lumens



86208 WTABZ,WTPL
1-Light Wall Sconce
10.25"W x 10.25"H x 4"Ext.
1 x 18w G24Q3 Bulb
1125 Rated Lumens



86206 WTABZ,WTPL
1-Light Wall Sconce
10.25"W x 10.25"H x 3.75"Ext.
1 x 18w G24Q3 Bulb
1125 Rated Lumens



86207 WTABZ,WTPL
2-Light Wall Sconce
14.5"W x 14.5"H x 4"Ext.
2 x 18w 2G11 Bulbs
250 Rated Lumens



86205 WTABZ,WTPL
2-Light Wall Sconce
14.5"W x 14.5"H x 4.5"Ext.
2 x 18w 2G11 Bulbs
2250 Rated Lumens





86197 WTABZ,WTPL
 1-Light Wall Sconce
 10"W x 4.75"H x 5.25"Ext.
 1 x 18w GU24 Bulb
 1125 Rated Lumens



86195 WTABZ,WTPL
 2-Light Wall Sconce
 8"W x 13.5"H x 4"Ext.
 2 x 13w 2GX7 Bulbs
 1680 Rated Lumens



86222 WTABZ,WTPL
 1-Light Wall Sconce
 7.25"W x 12"H x 3.5"Ext.
 1 x 18w GU24 Bulb
 1125 Rated Lumens





86202 WTABZ, WTPL
 2-Light Wall Sconce
 7.25"W x 12"H x 3.5"Ext.
 2 x 13w 2GX7 Bulbs
 1680 Rated Lumens



86201 WTABZ, WTPL
 2-Light Wall Sconce
 7.25"W x 12"H x 3.25"Ext.
 2 x 13w 2GX7 Bulbs
 1680 Rated Lumens



86200 WTABZ, WTPL
 2-Light Wall Sconce
 7.25"W x 12"H x 3.5"Ext.
 2 x 13w 2GX7 Bulbs
 1680 Rated Lumens





86194 WTABZ, WTPL
 1-Light Wall Sconce
 9"W x 12"H x 11"Ext.
 1 x 18w GU24 Bulb
 1125 Rated Lumens



86192 WTABZ, WTPL
 1-Light Wall Sconce
 9.75"W x 9.5"H x 5.25"Ext.
 1 x 18w GU24 Bulb
 1125 Rated Lumens



86190 WTABZ, WTPL 1-Light Post
 9"W x 12.5"H
 1 x 18w GU24 Bulb
 1125 Rated Lumens



Ultima Star 24

Features

- Highest StarStrand lumen light output
- Long runs up to 50 feet
- Plastic covered to reduce static failure
- Multiple lengths with soldered connectors for trouble free installation
- ETL approved for damp locations
- Highly flexible material that is backed with 3M adhesive tape for easy installation
- Field cuttable every 4 inches

Applications

- Office task lighting
- Under cabinet lighting
- Closets
- Work areas
- Display counters
- Steps and railings

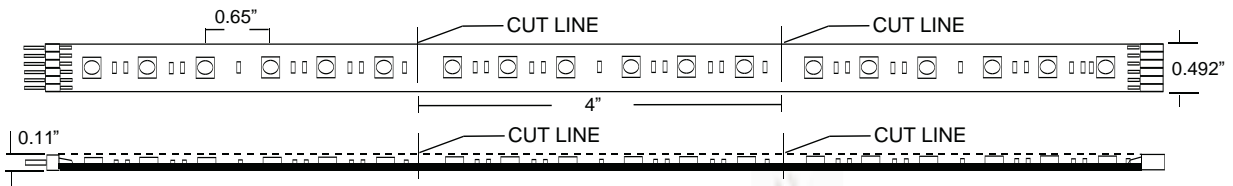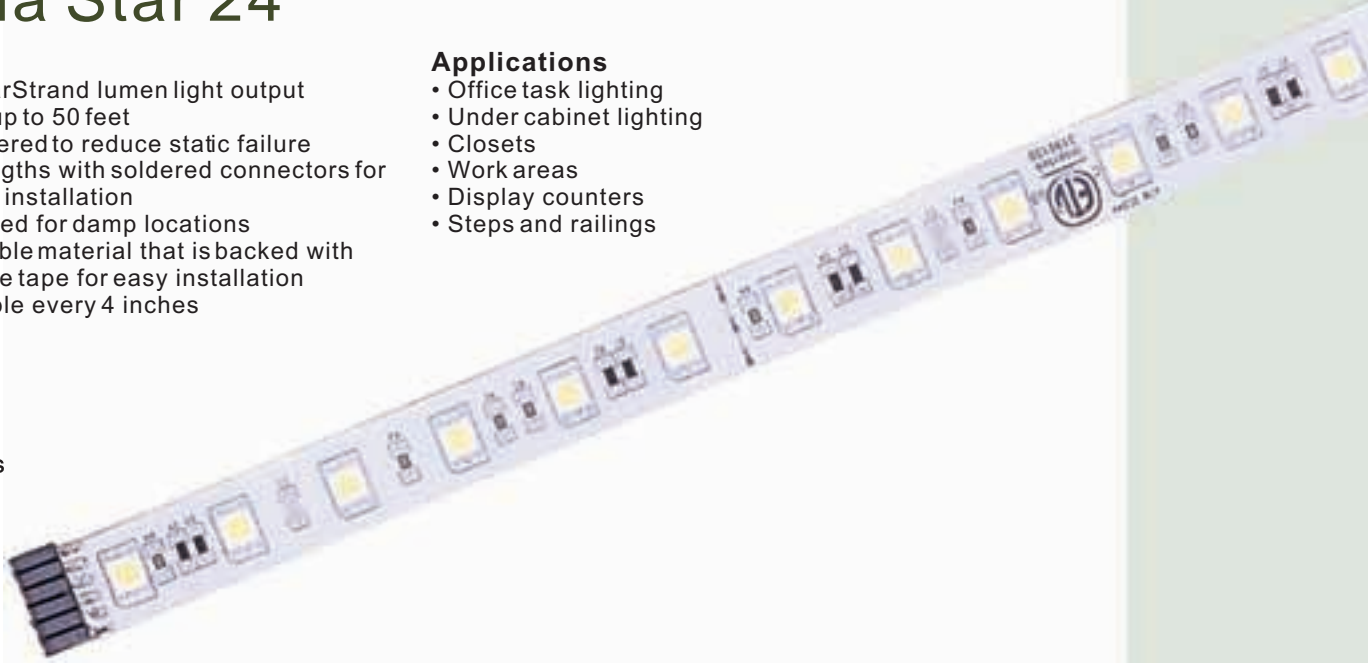

800.486.2946

Item	Length	Diodes	Wattage	Lumens	Color Temp	CRI	PC Board	Beam	Voltage	Current
53450	4"	6	1.44	45	3500 K	70-75	White	120°	24V	60mA
53451	1'	18	4.32	243	3500 K	70-75	White	120°	24V	180mA
53452	5'	90	21.6	1215	3500 K	70-75	White	120°	24V	900mA
53453	10'	180	43.2	2430	3500 K	70-75	White	120°	24V	1.8A
53454	20'	360	86.4	4860	3500 K	70-75	White	120°	24V	3.6A

Series	Using Driver/Controller	Maximum Run	Maximum Run Using 2 Output Cords
Ultima Star 24	53320 24V 75W Plug-In Driver	17'
Ultima Star 24	53311 24V 60w Class II Dimmable DirectWire Driver	13'
Ultima Star 24	53315 24V 96w Class II Dimmable Direct Wire Driver	22'
Ultima Star 24	53286 24V 96w Class II Direct Wire Driver	22'
Ultima Star 24	53287 24V 150w Direct Wire Driver	32'
Ultima Star 24	53288 24V 320w Direct Wire Driver	50'	70'

Warm White 120°	
Distance	Foot Candles
12in	73.86
24in	21
36in	10.74
48in	6.58

Shown using 1 foot section of Ultima Star 24

maximlighting.com

STARSTRAND™

24V 75w Plug-In Driver



53320

- 120V/240V input
 - Includes 72" 6-Pin output cord
 - Include 72" input cord with on/off switch
- Refer to page 67 for specifications*

24V 60w Class II Dimmable Direct Wire Driver



53311

- 120V/240V/277V input
 - Dims using any magnetic low voltage dimmer
 - Includes 72" 6-Pin output cord
- Refer to page 67 for specifications*

24V 96w Class II Direct Wire Driver



53286

- 120V/240V input
 - Includes 72" 6-Pin output cord
- Refer to page 67 for specifications*

24V 96w Class II Dimmable Direct Wire Driver



53315

- 120V input
 - Dims using any magnetic low voltage dimmer
 - Includes 72" 6-Pin output cord
- Refer to page 67 for specifications*

24V 150w Direct Wire Driver



53287

- 120V/240V input
 - Includes 72" 6-Pin output cord
- Refer to page 67 for specifications*

24V 320w Direct Wire Driver



53288

- 120V/240V input
 - Includes two 6-Pin output cords
 - 2 channel output
- Refer to page 67 for specifications*

24V Dimming Controller



53393

- Full range dimming and on/off
 - RF remote included
 - Installs between driver and first section of tape
- Refer to page 68 for specifications*
Replacement remote 53394

6-Pin 4-Way Connector



53350

- Allows for L, T & X installations
- A power block for branching
- Includes one male to male adapter and two male end caps

6-Pin Connecting Cords



53465 5"

53467 13"

53468 73"

- Extend distance between driver & tape
- Connect sections of tape together

6-Pin 90° Connector



53464

- For 90° corners, reversible for left or right
- One male end, one female end
- Includes 3M adhesive tape for easy mounting

36" Aluminum Channel



53274

- Creates valance to conceal tape
- Irregular surfaces installation
- Includes screws for installation

Plastic Wire Clip



53255

- Used to secure connecting cords & driver output cords to surface
- Backed with 3M adhesive tape
- Package of 10

Mounting Clip



53273

- Use on irregular surfaces when 3M adhesive tape is not sufficient
- Package of 20

6-Pin Rough In Terminal



53258

- Rough in for new installation construction
- Female connector on one end, with 2 wire quick connector on opposite end
- Includes one male to male adapter and screw for installation

6-Pin Silicone End Cap



53469

- Placed on run termination
- Protects against dust & damage
- Package of 10



Elite Star 24

Features

- High lumen light output
- Long runs up to 75 feet
- Plastic covered to reduce static failure
- Multiple lengths with soldered connectors for trouble free installation
- ETL approved for damp locations
- Highly flexible material that is backed with 3M adhesive tape for easy installation
- Field cuttable every 4 inches

Applications

- Cove and toe kick accent lighting
- Outdoor covered porch and patio
- Under cabinet lighting
- Step lighting
- Restaurants and lounges
- Boats and RV

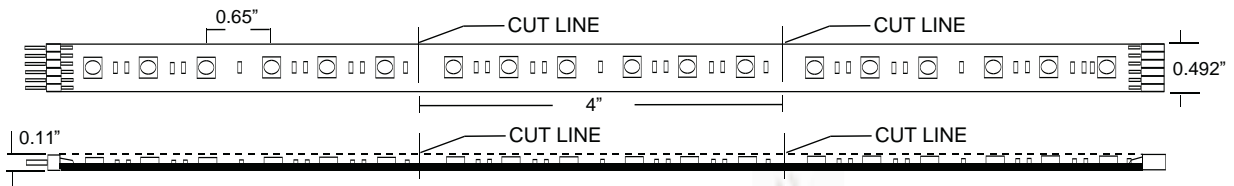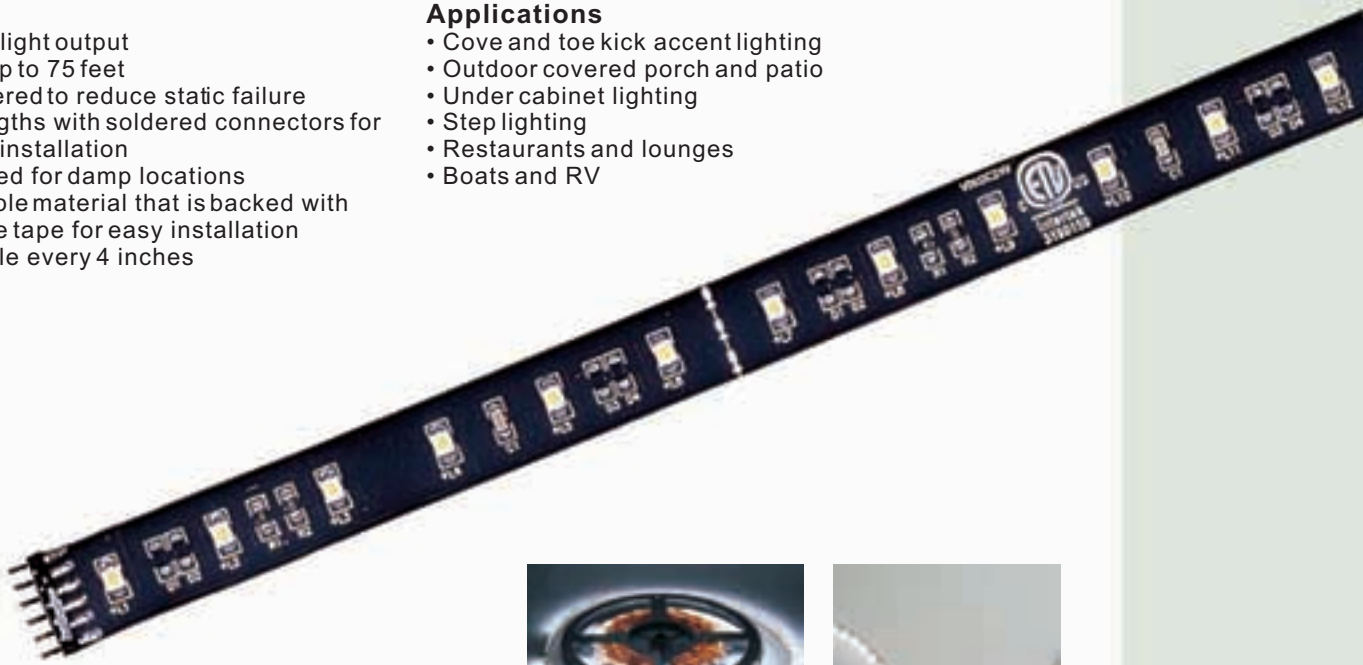

Item	Length	Diodes	Wattage	Lumens	Color Temp	CRI	PC Board	Beam	Voltage	Current
53430	4"	6	0.96	13.5	3500 K	70-75	Black	120°	24V	40mA
53431	1'	18	2.88	162	3500 K	70-75	Black	120°	24V	120mA
53432	5'	90	14.4	810	3500 K	70-75	Black	120°	24V	600mA
53433	10'	180	28.8	1620	3500 K	70-75	Black	120°	24V	1.2A
53434	20'	360	57.6	3240	3500 K	70-75	Black	120°	24V	2.4A

Series	Using Driver/Controller	Maximum Run	Maximum Run Using 2 Output Cords
Elite Star 24	53320 24V 75W Plug-In Driver	26'
Elite Star 24	53311 24V 60w Class II Dimmable DirectWire Driver	20'
Elite Star 24	53315 24V 96w Class II Dimmable Direct Wire Driver	33'
Elite Star 24	53286 24V 96w Class II Direct Wire Driver	33'
Elite Star 24	53287 24V 150w Direct Wire Driver	50'
Elite Star 24	53288 24V 320w Direct Wire Driver	75'	105'

Warm White 120°	
Distance	Foot Candles
12in	40.41
24in	12.16
36in	6.33
48in	3.84

Shown using 1 foot section of Elite Star 24

800.486.2946

maximlighting.com

STARSTRAND™

24V 75w Plug-In Driver



53320

- 120V/240V input
 - Includes 72" 6-Pin output cord
 - Include 72" input cord with on/off switch
- Refer to page 67 for specifications*

24V 60w Class II Dimmable DirectWire Driver



53311

- 120V/240V/277V input
 - Dims using any magnetic low voltage dimmer
 - Includes 72" 6-Pin output cord
- Refer to page 67 for specifications*

24V 96w Class II Direct Wire Driver



53286

- 120V/240V input
 - Includes 72" 6-Pin output cord
- Refer to page 67 for specifications*

24V 96w Class II Dimmable DirectWire Driver



53315

- 120V input
 - Dims using any magnetic low voltage dimmer
 - Includes 72" 6-Pin output cord
- Refer to page 67 for specifications*

24V 150w DirectWire Driver



53287

- 120V/240V input
 - Includes 72" 6-Pin output cord
- Refer to page 67 for specifications*

24V 320w DirectWire Driver



53288

- 120V/240V input
 - Includes two 6-Pin output cords
 - 2 channel output
- Refer to page 67 for specifications*

24V Dimming Controller



53393

- Full range dimming and on/off
 - RF remote included
 - Installs between driver and first section of tape
- Refer to page 68 for specifications*
Replacement remote 53394

6-Pin 4-Way Connector



53350

- Allows for L, T & X installations
- A power block for branching
- Includes one male to male adapter and two male end caps

6-Pin Connecting Cords



53465 5"

53467 13"

53468 73"

- Extend distance between driver & tape
- Connect sections of tape together

6-Pin 90° Connector



53464

- For 90° corners, reversible for left or right
- One male end, one female end
- Includes 3M adhesive tape for easy mounting

36" Aluminum Channel



53274

- Creates valance to conceal tape
- Irregular surfaces installation
- Includes screws for installation

Plastic Wire Clip



53255

- Used to secure connecting cords & driver output cords to surface
- Backed with 3M adhesive tape
- Package of 10

Mounting Clip



53273

- Use on irregular surfaces when 3M adhesive tape is not sufficient
- Package of 20

6-Pin Rough In Terminal



53258

- Rough in for new installation construction
- Female connector on one end, with 2 wire quick connector on opposite end
- Includes one male to male adapter and screw for installation

6-Pin Silicone End Cap



53469

- Placed on run termination
- Protects against dust & damage
- Package of 10


Aqua Star 24

Features

- Waterproof IP68 LED tape
- Chemical and UV resistant plastic cover
- Long runs up to 50'
- Installs into aluminum channel or plastic mouting clips
- High lumen double chip LED
- Multiple lengths with watertight IP68 connectors
- Field cuttable every 4 inches

Applications

- Swimming pools and fountains
- Outdoor decks
- Step and stairs
- Landscape lighting
- Outdoor building accent lighting
- Driveway and sidewalk illumination

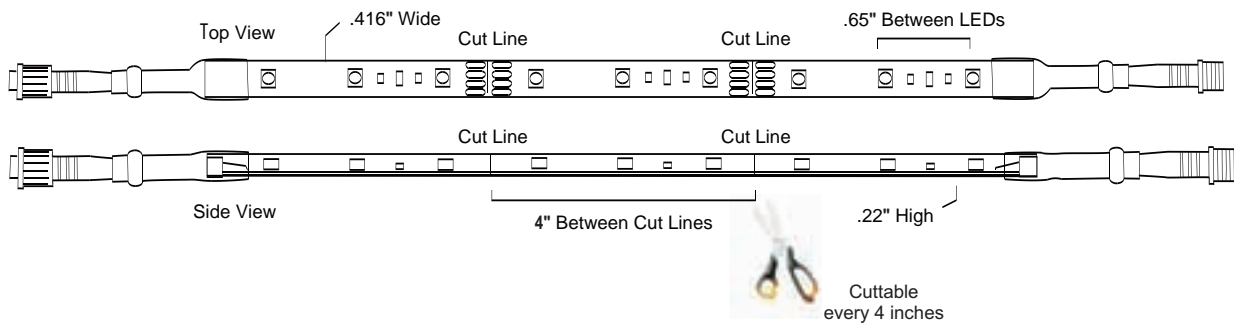

Item	Length	Diodes	Wattage	Lumens	Color Temp	CRI	PC Board	Beam	Voltage	Current
53441	2'	36	5.76	324	3500 K	70-75	Black	120°	24V	240mA
53442	5'	90	14.4	810	3500 K	70-75	Black	120°	24V	600mA
53443	10'	180	28.8	1620	3500 K	70-75	Black	120°	24V	1.2A
53445	25'	450	72	4050	3500 K	70-75	Black	120°	24V	3A

Series	Using Driver/Controller	Maximum Run
Aqua Star 24	53380 24V 60w Weatherproof Driver	21'
Aqua Star 24	53316 24V 96w Class II Dimmable Direct Wire Driver	33'
Aqua Star 24	53381 24V 150w Weatherproof Driver	50'

800.486.2946

maximlighting.com


STARSTRAND™

24V 60w Weatherproof Driver



- 53380**
- 120V/240V/277V input
 - Suitable for indoor and outdoor applications
 - IP67 rated for wet locations (not submersible)
 - Includes 72" outdoor output cord
- Refer to page 68 for specifications*

60" Aluminum Channel




- 53373**
- Can be recessed or surface mount
 - Silicone sealant required for tape installation (not included)

24V 96w Class II Dimmable DirectWire Driver



- 53316**
- 120V input
 - Dims using any magnetic low voltage dimmer
 - Must be placed indoors
 - Includes 72" outdoor output cord
- Refer to page 67 for specifications*

48" 45° Angle Mounting Channel



- 53374**
- Surface mount to angle tape for accent lighting
 - Aluminum screws included

24V 150w Weatherproof Driver



- 53381**
- 120V/240V/277V input
 - Suitable for indoor and outdoor applications
 - IP65 rated for wet locations (not submersible)
 - Includes 72" outdoor output cord
- Refer to page 68 for specifications*

Silicone End Cap Kit



- 53368**
- Placed on run termination
 - Protects against dust & damage

24V Outdoor Connecting Cords



- 53364** 48"
53365 144"
- Extend distance between driver & tape (maximum 24 feet)
 - Extend distance between two sections of tape
 - IP68 rated for underwater to 10'

Mounting Clip



- 53370**
- Used to secure tape to surface
 - Stainless steel screws included
 - Clear polycarbonate plastic
 - Package of 6

Warm White 120°	
Distance	Foot Candles
12in	40.41
24in	12.16
36in	6.33
48in	3.84

Shown using 1 foot section of Aqua Star24



Rainbow Star 24

Features

- Thousands of colors on one tape
- Long runs up to 30 feet
- DMX interface with optional controller
- Plastic covered to reduce static failure
- ETL approved for damp locations
- Multiple lengths with soldered connectors for trouble free installation
- Field cuttable every 4 inches

Applications

- Cove and toe kick accent lighting
- Restaurants, bars and lounges
- Store front displays
- Back lighting of glass and acrylic panels
- Game and theatre rooms
- Discos and clubs

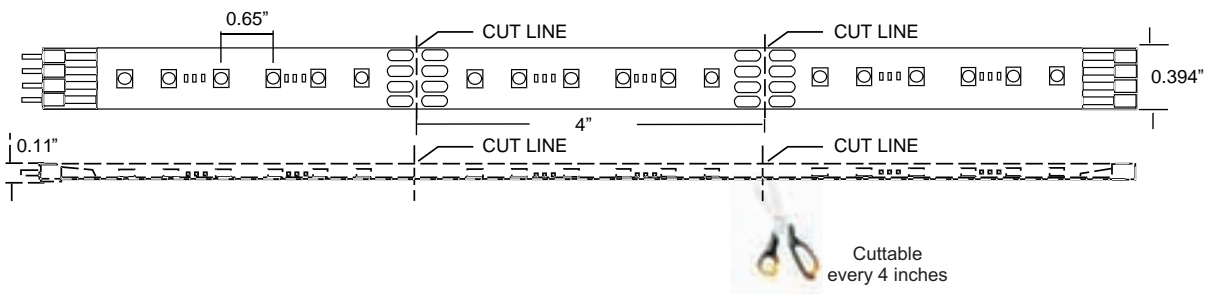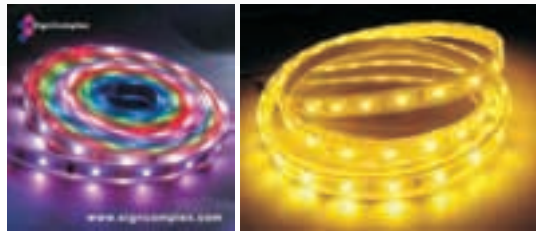

Item	Length	Diodes	Wattage	Lumens	PC Board	Beam	Voltage	Current
53530	4"	6	1.44	R:3 G:10 B:2.5	White	120°	24V	60mA
53531	1'	18	4.32	R:18 G:60 B:15	White	120°	24V	180mA
53533	5'	90	21.6	R:90 G:320 B:75	White	120°	24V	900mA
53534	10'	180	43.2	R:180 G:630 B:150	White	120°	24V	1.8A
53535	20'	360	86.4	R:360 G:1260 B:300	White	120°	24V	3.6A

Series	Using Driver/Controller	Maximum Run
Rainbow Star 24	53320 24V 75w Plug-In Driver	17'
Rainbow Star 24	53286 24V 96w Class II Direct Wire Driver	22'
Rainbow Star 24	53287 24V 150w Direct Wire Driver	30'

800.486.2946

maximlighting.com

STARSTRAND™

24V 75w Plug-In Driver



53320

- 120V/240V input
 - Includes 72" 6-Pin output cord
 - Include 72" input cord with on/off switch
- Refer to page 67 for specifications*

4-Pin Silicone End Cap



53269

- Placed on run termination
- Protects against dust & damage
- Package of 10

24V 96w Class II Direct Wire Driver



53286

- 120V/240V input
 - Includes 72" 6-Pin output cord
- Refer to page 67 for specifications*

4-Pin Connecting Cords



53265 3"

53267 13"

53268 73"

- Extend distance between driver & tape
- Connect sections of tape together

24V 150w Direct Wire Driver



53287

- 120V/240V input
 - Includes 72" 6-Pin output cord
- Refer to page 67 for specifications*

RGB 4-Pin Rough In Terminal



53383

- Rough in for new installations construction
- Female connector on one end, with 4 wire quick connector on opposite end
- Includes one male to male adapter and screw for installation

24V RGB Controller



53385

- Controls color, intensity and speed
 - Controls 30' of tape
 - RF remote control included
 - 4" 6-Pin input cord, 72" 4-Pin output cord
- See page 68 for specifications*
Replacement Remote 53395

36" Aluminum Channel



53274

- Creates valance to conceal tape
- Irregular surfaces installation
- Includes screws for installation

24V DMX512 RGB Controller



53387

- Meets DMX512 protocol. Can be used as DMX decoder
 - Output power 12 x 48 watts
 - RF remote control included
 - 4" 6-Pin input cord, 72" 4-Pin output cord
- Replacement Remote 53396*

Plastic Wire Clip



53255

- Used to secure connecting cords & driver output cords to surface
- Backed with 3M adhesive tape
- Package of 10

24V RGB Amplifier



53386

- Used to synchronize multiple Rainbow Star 24 runs to one controller
 - Requires additional driver
 - Controls 30' of tape
- See page 68 for specifications*

Mounting Clip



53272

- Use on irregular surfaces when 3M adhesive tape is not sufficient
- Package of 20



Rainbow Aqua Star 24

Features

- Waterproof IP68 color changing LED tape
- Nine modes of color and movement
- Chemical and UV resistant plastic cover
- Long runs up to 30 feet
- Installs into aluminum channel or plastic mouting clips
- Multiple lengths with watertight IP68 connectors
- Field cuttable every 4 inches

Applications

- Swimming pools and fountains
- Outdoor living areas
- Landscape lighting
- Outdoor architectural features
- Signs
- Outdoor walkways

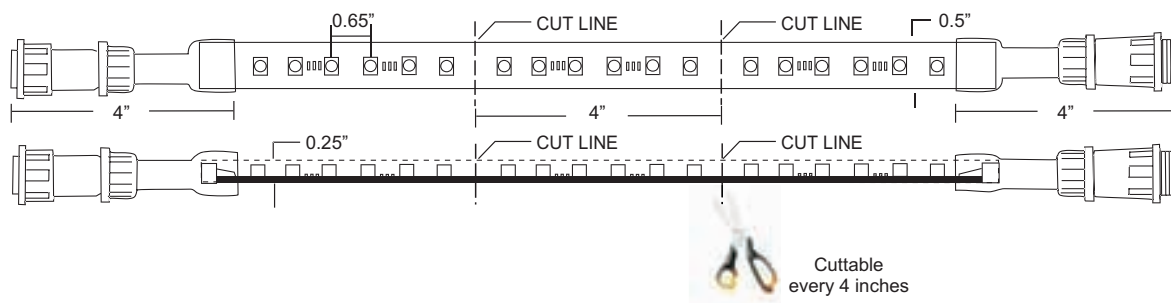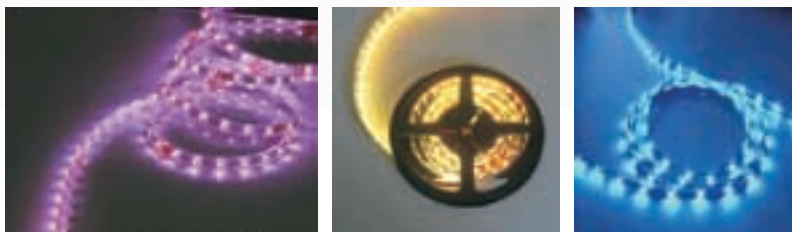

Item	Length	Diodes	Wattage	Lumens	PC Board	Beam	Voltage	Current
53541	2'	36	8.64	R:36 G:120 B:30	White	120°	24V	360mA
53542	5'	90	21.6	R:90 G:320 B:75	White	120°	24V	900mA
53543	10'	180	43.2	R:180 G:630 B:150	White	120°	24V	1.8A
53545	25'	450	108	R:450 G:1500 B:375	White	120°	24V	4.5A

Series	Using Driver/Controller	Maximum Run
Rainbow Aqua Star 24	53380 24V 60w Weatherproof Driver	13'
Rainbow Aqua Star 24	53381 24V 150w Weatherproof Driver	30'

800.486.2946

maximlighting.com

STARSTRAND™

24V 60w Weatherproof Driver




53380

- 120V/240V/277V input
- Suitable for indoor and outdoor applications
- IP67 rated for wet locations (not submersible)
- Includes 72" outdoor output cord

Refer to page 68 for specifications

60" Aluminum Channel



53373

- Can be recessed or surface mount
- Silicone sealant required for tape installation (not included)

24V 150w Weatherproof Driver




53381

- 120V/240V/277V input
- Suitable for indoor and outdoor applications
- IP65 rated for wet locations (not submersible)
- Includes 72" outdoor output cord

Refer to page 68 for specifications

48" 45° Angle Mounting Channel



53374

- Surface mount to angle tape for accent lighting
- Aluminum screws included

24V Weatherproof RGB Controller



53389

- Controls color, intensity and speed
- Controls 30' of tape
- RF remote control included
- IP65 rated (not submersible)

See page 68 for specifications
Replacement Remote 53396

Silicone End Cap Kit



53368

- Placed on run termination
- Protects against dust & damage

24V Weatherproof RGB Amplifier



53390

- Used to synchronize multiple Rainbow Aqua Star 24 runs to one controller
- Requires additional driver
- Controls 30' of tape
- IP65 rated (not submersible)

See page 68 for specifications

Mounting Clip



53370

- Used to secure tape to surface
- Stainless steel screws included
- Clear polycarbonate plastic
- Package of 6

Outdoor Connecting Cords



53364 48"

53365 144"

- Extend distance between driver & tape (maximum 24 feet)
- Extend distance between two sections of tape
- IP68 rated for underwater to 10'


Channel Star 24

Features

- High lumen output
- Available in both Bronze and Aluminum finish
- Clear lens for maximum light output
- Rigid aluminum channel conceals light source and provides excellent heat dissipation
- Connect end to end or with the use of connecting cables
- Available in 3500 K or 5000 K
- Includes easy to install mounting clips, both downward and 45° angle

Applications

- Under cabinets and bars
- Office desk task lighting
- Retail display cabinets and counters
- Window displays
- Closet lighting

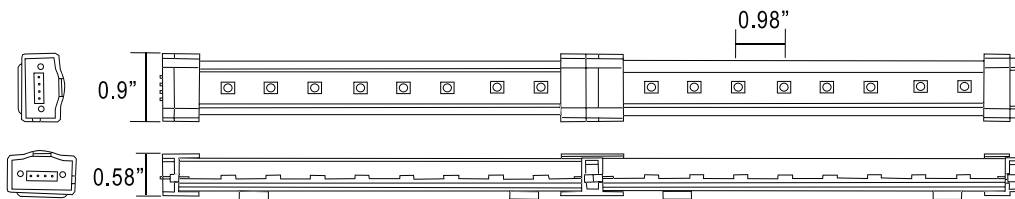

800.486.2946

maximlighting.com

Item	Length	Diodes	Wattage	Lumens	Color Temp	CRI	Beam	Voltage	Current
53700 AL, BRZ	6"	8	2.88	120	3500 K	70 - 75	120°	24V	80mA
53701 AL, BRZ	12"	15	4.32	216	3500 K	70 - 75	120°	24V	180mA
53702 AL, BRZ	24"	30	8.64	432	3500 K	70 - 75	120°	24V	360mA
53703 AL, BRZ	36"	45	12.96	648	3500 K	70 - 75	120°	24V	540mA
53704 AL, BRZ	48"	60	17.28	864	3500 K	70 - 75	120°	24V	720mA
53710 AL, BRZ	6"	8	2.88	150	5000 K	70 - 75	120°	24V	80mA
53711 AL, BRZ	12"	15	4.32	270	5000 K	70 - 75	120°	24V	180mA
53712 AL, BRZ	24"	30	8.64	540	5000 K	70 - 75	120°	24V	360mA
53713 AL, BRZ	36"	45	12.96	810	5000 K	70 - 75	120°	24V	540mA
53714 AL, BRZ	48"	60	17.28	1080	5000 K	70 - 75	120°	24V	720mA

Series	Using Driver/Controller	Maximum Run
Channel Star 24	53313 24V 60w Plug-In Driver	13'
Channel Star 24	53320 24V 75w Plug-In Driver	17'
Channel Star 24	53311 24V 60w Class II Dimmable DirectWire Driver	13'
Channel Star 24	53315 24V 96w Class II Dimmable Direct Wire Driver	22'
Channel Star 24	53286 24V 96w Class II Direct Wire Driver	22'
Channel Star 24	53287 24V 150w Direct Wire Driver	32'

Warm White 120°	
Distance	Foot Candles
12in	73.86
24in	21
36in	10.74
48in	6.58

Shown using 1 foot section of Channel Star 24

STARSTRAND™

24V 60w Plug-In Driver



53313

- 120V/240V input
 - Plugs directly into wall outlet
 - Include 60" 4-Pin output cord
- Refer to page 68 for specifications*

4-Pin Connecting Cords



53265 3"

53267 13"

53268 73"

- Extend distance between driver & tape
- Connect sections of tape together

24V 75w Plug-In Driver



53320

- 120V/240V input
 - Includes 72" 6-Pin output cord
 - Include 72" input cord with on/off switch
- Refer to page 67 for specifications*

Plastic Wire Clip



53255

- Used to secure connecting cords & driver output cords to surface
- Backed with 3M adhesive tape
- Package of 10

24V 60w Class II Dimmable DirectWire Driver



53311

- 120V/240V/277V input
 - Dims using any magnetic low voltage dimmer
 - Includes 72" 6-Pin output cord
- Refer to page 67 for specifications*

Rough In Terminal Block



53257 3"

- Rough in for new installation construction
- 3" female connector on one end, with two wire quick connector on the opposite end
- Includes one male to male adapter and screw for installation

24V 96w Class II Direct Wire Driver



53286

- 120V/240V input
 - Includes 72" 6-Pin output cord
- Refer to page 67 for specifications*

4 Pin to 6 Pin Adapter Cord



53352

- 6-Pin female to 4-Pin male
- Connects 4-Pin 24V system to 6-Pin 24V drivers
- Included in every 24", 36" and 48" section of Channel Star 24

24V 96w Class II Dimmable DirectWire Driver



53315

- 120V input
 - Dims using any magnetic low voltage dimmer
 - Includes 72" 6-Pin output cord
- Refer to page 67 for specifications*

4-Pin to 6-Pin Adapter Cord with On/Off Switch



53353

- 6-Pin female to 4-Pin male
- Used when not controlled by wall switch

24V 150w DirectWire Driver



53287

- 120V/240V input
 - Includes 72" 6-Pin output cord
- Refer to page 67 for specifications*

Mounting Clips



53354

- Additional clips for mounting Channel Star 24
- Package of 4
- Included two mounting clips

24V Dimming Controller



53393

- Full range dimming and on/off
- RF remote included
- Installs between driver and first section of tape

Refer to page 68 for specifications
Replacement remote 53394

45° Mounting Clips



53355

- Additional clips for mounting Channel Star 24
- Package of 4
- Included two mounting clips


Rainbow Channel Star 24

Features

- Available in Aluminum finish only
- Clear lens for maximum light output
- Rigid aluminum channel conceals light source and provides excellent heat dissipation
- Connect end to end or with the use of connecting cables
- Thousands of color combinations available
- Includes easy to install mounting clips, both downward and 45° angle

Applications

- Under cabinets and bars
- Alcove lighting
- Retail display cabinets and counters
- Window displays
- Sign illumination

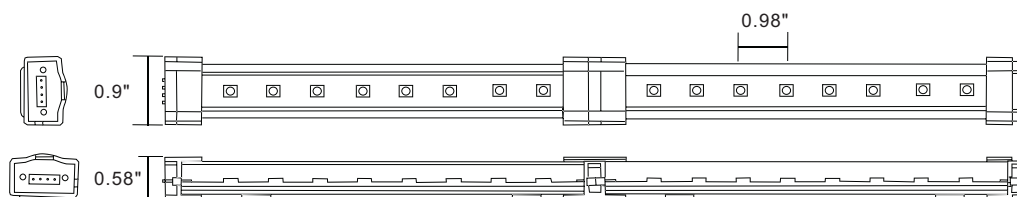

Item	Length	Diodes	Wattage	Lumens	Color Temp	CRI	Beam	Voltage	Current
53720AL	6"	8	2.88				120°	24V	80mA
53721AL	12"	15	4.32				120°	24V	180mA
53722AL	24"	30	8.64				120°	24V	360mA
53723AL	36"	45	12.96				120°	24V	540mA
53724AL	48"	60	17.28				120°	24V	720mA

Series	Using Driver/Controller	Maximum Run
Rainbow Channel Star 24	53313 24V 60w Plug-In Driver	13'
Rainbow Channel Star 24	53320 24V 75w Plug-In Driver	17'
Rainbow Channel Star 24	53286 24V 96w Class II Direct Wire Driver	22'
Rainbow Channel Star 24	53287 24V 150w Direct Wire Driver	30'

800.486.2946

maximlighting.com

STARSTRAND™

24V 60w Plug-In Driver



53313

- 120V/240V input
 - Plugs directly into wall outlet
 - Include 60" 4-Pin output cord
- Refer to page 68 for specifications*

24V 75w Plug-In Driver



53320

- 120V/240V input
 - Includes 72" 6-Pin output cord
 - Include 72" input cord with on/off switch
- Refer to page 67 for specifications*

24V 96w Class II Direct Wire Driver



53286

- 120V/240V input
 - Includes 72" 6-Pin output cord
- Refer to page 67 for specifications*

24V 150w Direct Wire Driver



53287

- 120V/240V input
 - Includes 72" 6-Pin output cord
- Refer to page 67 for specifications*

24V RGB Controller



53385

- Controls color, intensity and speed
 - Controls 30' of tape
 - RF remote control included
 - 4" 6-Pin input cord, 72" 4-Pin output cord
- See page 68 for specifications*
Replacement Remote 53395

24V DMX512 RGB Controller



53387

- Meets DMX512 protocol. Can be used as DMX decoder
 - Output power 12 x 48 watts
 - RF remote control included
 - 4" 6-Pin input cord, 72" 4-Pin output cord
- Replacement Remote 53396*

24V RGB Amplifier



53386

- Used to synchronize multiple Rainbow Star 24 runs to one controller
 - Requires additional driver
 - Controls 30' of tape
- See page 68 for specifications*

4-Pin Connecting Cords



53265 3"

53267 13"

53268 73"

- Extend distance between driver & tape
- Connect sections of tape together

RGB 4-Pin Rough In Terminal



53383

- Rough in for new installations construction
- Female connector on one end, with 4 wire quick connector on opposite end
- Includes one male to male adapter and screw for installation

Plastic Wire Clip



53255

- Used to secure connecting cords & driver output cords to surface
- Backed with 3M adhesive tape
- Package of 10

24V 72" Output Cord



53253

- For 53287 150w 24V Direct Wire Driver
- Used to increase maximum run distance by powering from middle or corner

4 Pin to 6 Pin Adapter Cord



53352

- 6-Pin female to 4-Pin male
- Connects 4-Pin 24V system to 6-Pin 24V drivers
- Included in every 24", 36" and 48" section of Rainbow Channel Star 24

4-Pin to 6-Pin Adapter Cord with On/Off Switch



53353

- 6-Pin female to 4-Pin male
- Used when not controlled by wall switch

Mounting Clips



53354

- Additional clips for mounting Channel Star 24
- Package of 4
- Included two mounting clips

45° Mounting Clips



53355

- Additional clips for mounting Channel Star 24
- Package of 4
- Included two mounting clips

Basic Star

Features


- Low power consumption only 1.4 watts per foot
- Warm but not yellow 3500 K color
- Highly flexible material that is backed with 3M adhesive tape for easy installation
- No heat and no UV radiation
- Supplied in 16'4" continuous lengths and can be field cut every 2"
- Soldered connectors supplied on each end
- Additional two power feeds and one splicer supplied.

Applications

- Cove and toe kick accent lighting
- Cabinet lighting
- Architectural features
- Point of purchase displays
- Backlighting of signs and displays
- Wine cellars
- Closets



800.486.2946

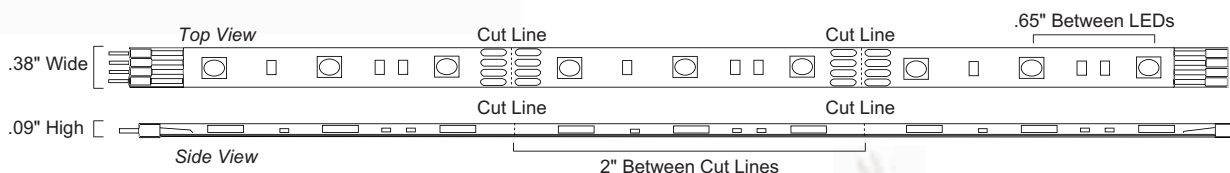

Item	Length	Diodes	Wattage	Lumens	Color Temp	CRI	PC Board	Beam	Voltage	Current
53201	16 ft. 4in	300	24	1350	3500 K	70-75	Copper	120°	12V	20mA

Series	Using Driver/Controller	Maximum Run
Basic Star	53275 12V 60w Class II Plug-In Driver	33'
Basic Star	53305 12V 60w Class II Direct Wire Driver	33'
Basic Star	53310 12V 60w Class II Dimmable Direct Wire Driver	33'

Warm White 120°	
Distance	Foot Candles
12in	19.42
24in	5.86
36in	2.93
48in	1.84

Shown using 1 foot section of Basic Star

maximlighting.com

STARSTRAND™

12V 60w Class II Plug-In Driver



- 53275**
- 120V/240V input
 - One 72" 4-Pin output cord & one 72" power cord
 - Inline on/off switch
- Refer to page 67 for specifications*

Tape Splicer



- 53261**
- Joins two sections if tape is cut
 - One included with 53201
 - Package of 10

12V 96w Class II Direct Wire Driver



- 53305**
- 120V/240V input
 - Includes 72" 4-Pin output cord
- Refer to page 67 for specifications*

36" Aluminum Channel



- 53254**
- Creates valance to conceal tape
 - Irregular surfaces installation
 - Includes screws for installation

12V 60w Class II Dimmable Direct Wire Driver



- 53310**
- 120V/240V 277V input
 - Dims using any magnetic low voltage dimmer
 - Includes 72" 4-Pin output cord
- Refer to page 67 for specifications*

4-Pin Silicone End Cap



- 53269**
- Placed on run termination
 - Protects against dust & damage
 - Package of 10

4-Pin Connecting Cords



- 53265** 3"
53267 13"
53268 73"
- Extend distance between driver & tape
 - Connect sections of tape together

Plastic Wire Clip



- 53255**
- Used to secure connecting cords & driver output cords to surface
 - Backed with 3M adhesive tape
 - Package of 10

Flexible Connector



- 53259**
- Use for corners and angles
 - Package of 6

Heat Shrink Wrap



- 53256**
- Secure connections when in walls
 - Waterproof in damp location installations
 - Heat gun required for installation
 - Package of 10

End Power Feed



- 53260**
- Required if tape is cut
 - Two included with 53201
 - Package of 6

Rough In Terminal Block



- 53257** 3"
- Rough in for new installation construction
 - 3" female connector on one end, with two wire quick connector on the opposite end
 - Includes one male to male adapter and screw for installation

Drivers/Controllers

12V 60w Class II Plug-In Driver



53275

- 120V / 240V input
- 12V, 5A output
- 72" input cord with switch
- Includes 72" 4-Pin output cord

24V 96w Class II Direct Wire Driver



53286

- 8"L x 38"W x 1.5"H
- Class II
- Built in PFC function
- Short circuit protection, overload protection, over voltage protection
- Operating temperature -22°F to 122°F
- 120V / 240V input
- 24V, 4A output
- Includes 72" 6-Pin output cord

12V 96w Class II Direct Wire Driver



53305

- 7"L x 2.5"W x 1.5"H
- Class II
- Built in PFC function
- Short circuit protection, overload protection, over voltage protection
- Operating temperature -22°F to 122°F
- 120V / 240V input
- 12V, 5A output
- Includes 72" 4-Pin output cord

24V 96w Class II Dimmable Direct Wire Driver



53315 Elite Star 24/Ultima Star 24

53316 Aqua Star 24

- 11.25"L x 3.375"W x 3.25"H
- Universal input 120V
- 4V, 4A output
- Class II UL1310
- Short circuit protection, overload protection
- Operating temperature -22°F to 140°F
- Requires magnetic low voltage dimmer (not included)
- Includes 72" 6-Pin output cord

12V/24V 60w Class II Dimmable Direct Wire Driver



53310 12V 53311 24V

- 6.95"L x 3.75"W x 3"H
- Universal input 120V / 240V / 277V
- 24V, 2.5A output
- Class II UL1310
- Short circuit protection, overload protection
- Operating temperature -22°F to 140°F
- Requires magnetic low voltage dimmer (not included)
- Includes 72" output cord

24V 150w Direct Wire Driver



53287

- 7.75"L x 3.75"W x 1.5"H
- Short circuit protection, overload protection, over voltage protection
- Operating temperature -22°F to 122°F
- 120V / 240V input
- 24V, 6.5A output
- Includes 72" 6-Pin output cord

24V 75w Plug-In Driver



53320

- Universal input 120V / 240V
- 24V, 3A output
- 72" input cord with switch
- Includes 72" 6-Pin output cord

24V 320w Direct Wire Driver



53288

- 8.5"L x 4.5"W x 2.25"H
- Short circuit protection, overload protection, over voltage protection
- Operating temperature -22°F to 122°F
- 120V / 240V input
- 24V, 12.5A output
- Includes two 72" 6-Pin output cords

STARSTRAND™

24V 60w Plug-In Driver



53313

- 4.25"L x 2.5"W x 1.37"H
- 100V / 240V input
- 24V, 2.5A Output
- Short circuit protection, overload protection
- Includes 72" 4-Pin output cord

24V Dimming Controller



53393

- 3"L x 2.5"W x 1"H
- Input Voltage 24V
- Controls 30' of tape
- Operating temperature -4°F to 158°F
- Installs between driver and first section of tape

24V 60w Weatherproof Driver



53380

- 7.75"L x 2.5"W x 1.5"H
- 120V / 277V input
- 24V, 2.5A Output
- Class II UL 1310
- IP 67 rated
- Built in PFC function (Constant Current)
- Short circuit protection, overload protection, over voltage protection
- Operating temperature -22°F to 158°F
- Includes 72" 6-Pin output cord

24V Weatherproof RGB Controller



53389

- 4"L x 2.5"W x 1"H
- Controls 30' of tape
- Operating temperature -4°F to 158°F
- IP65 rated
- 9 modes
- 0 - 20 speed levels
- RF controller included

Modes

- | | |
|------------------|---------------------------|
| 1. Static Red | 6. Static Purple |
| 2. Static Yellow | 7. Static White |
| 3. Static Green | 8. Single Colors Jump |
| 4. Static Cyan | 9. Gradual Color Changing |
| 5. Static Blue | |

24V 150w Weatherproof Driver



53381

- 8.75"L x 2.75"W x 1.5"H
- 120V / 277V input
- 24V, 2.5A Output
- Class II UL 1310
- IP 67 rated
- Built in PFC function (Constant Current)
- Short circuit protection, overload protection, over voltage protection
- Operating temperature -22°F to 158°F
- Includes 72" 6-Pin output cord

24V RGB Controller



53385

- 4"L x 2.5"W x 1"H
- Controls 30' of tape
- Operating temperature -4°F to 158°F
- For indoor use only
- 9 modes
- 0 - 20 speed levels
- 10 levels of dimming
- therefore controller included

Modes

- | | |
|------------------|---------------------------|
| 1. Static Red | 6. Static Purple |
| 2. Static Yellow | 7. Static White |
| 3. Static Green | 8. Single Colors Jump |
| 4. Static Cyan | 9. Gradual Color Changing |
| 5. Static Blue | |

24V Weatherproof RGB Amplifier



53390

- 3"L x 2.5"W x 1"H
- Control 30' of tape
- Operating temperature -4°F to 158°F
- IP65 rated
- Requires additional driver to continue run

24V RGB Amplifier



53386

- 3"L x 2.5"W x 1"H
- Controls 30' of tape
- Operating temperature -4°F to 158°F
- Indoor use
- Requires additional driver to continue run

Arc ES

Arc ES, an ENERGY STAR certified contemporary style collection from Maxim Lighting made out of stainless steel, uses energy saving GU24 based fluorescent bulbs and features both indoor and outdoor wall sconces with Frosted glass, available in two finishes, Stainless Steel and Oil Rubbed Bronze.

Features:

- Made of Stainless Steel
- Energy Star Certified
- ADA Compliant
- Self Ballasted GU24 Bulbs
- 2700 K Color Temperature
- 10,000 Rated Life Hours
- Meets California Title 24 Requirements
- Includes Photo Cell and Bulbs

85006FTSST 2-Light Wall**
 Stainless Steel
 6.5"W x 12"H x 4"Ext.
 HCO 6.5"
 2 x 13w GU24 CFL Bulbs (Included)
 Stainless Steel



85005FTSST 1-Light Wall**
 Stainless Steel
 6"W x 9"H x 4"Ext.
 HCO 3.5"
 1 x 13w GU24 CFL Bulb (Included)
 Stainless Steel



REPLACEMENT BULBS
 13W - BUFPL13004
 18W - BUFPL18005
 26W - BUFPL26006



85006FTOI 2-Light Wall**
 Oil Rubbed Beonze
 6.5"W x 12"H x 4"Ext.
 HCO 6.5"
 2 x 13w GU24 CFL Bulbs (Included)
 Stainless Steel



85005FTOI 1-Light Wall**
 Oil Rubbed Beonze
 6"W x 9"H x 4"Ext.
 HCO 3.5"
 1 x 13w GU24 CFL Bulb (Included)
 Stainless Steel



**Photo Cell Included

Arc CF

Features:

- Made of Stainless Steel
- Energy Star Certified
- ADA Compliant
- Electronic NPF Ballast
- 2700 K Color Temperature
- 10,000 Rated Life Hours
- Meets California Title 24 Requirements
- Includes Photo Cell and Bulb

Arc CF, an ENERGY STAR certified contemporary style collection from Maxim Lighting made out of stainless steel, uses energy saving fluorescent lighting and features both indoor and outdoor wall sconces with Frosted glass, available in two finishes, Stainless Steel and Oil Rubbed Bronze.



85002FTSST** 1-Light Wall
Stainless Steel
6.5"W x 12"H x 4"Ext.
HCO 6.5"
1 x 26w G24q-3 Quad T4 CFL Bulb (Included)
Electronic Ballast
Stainless Steel



85000FTSST** 1-Light Wall
Stainless Steel
6"W x 9"H x 4"Ext.
HCO 3.5"
1 x 13w G24q-1 Quad T4 CFL Bulb (Included)
Electronic Ballast
Stainless Steel



**Photo Cell Included



85002FTOI** 1-Light Wall
Oil Rubbed Beonze
6.5"W x 12"H x 4"Ext.
HCO 6.5"
1 x 26w G24q-3 Quad T4 CFL Bulb (Included)
Electronic Ballast
Stainless Steel



85000FTOI** 1-Light Wall
Oil Rubbed Beonze
6"W x 9"H x 4"Ext.
HCO 3.5"
1 x 13w G24q-1 Quad T4 CFL Bulb (Included)
Electronic Ballast
Stainless Steel



Westport ES

VIVEX™

- Self Ballasted GU24 Bulbs
- 2700 K Color Temperature
- 10,000 Rated Life Hours
- Meets California Title 24 Requirements

85405MCAT 1-Light Wall
Artesian Bronze
13"W x 25"H x 16"Ext.
HCO 10.5" • BP 5.5"W x 11.5"H
1 x 26w GU24 Bulb (Included)
1680 Rated Lumens



85404MCAT 1-Light Wall
Artesian Bronze
10.5"W x 21"H x 14"Ext.
HCO 8.5" • BP 5.5"W x 11.5"H
1 x 18w GU24 Bulb (Included)
1100 Rated Lumens



85403MCAT 1-Light Wall
Artesian Bronze
9"W x 17.5"H x 11.5"Ext.
HCO 7" • BP 4.5"W x 7.5"H
1 x 13w GU24 Bulb (Included)
800 Rated Lumens



85409MCAT 2-Light Flush Mount
 Artesian Bronze
 13"W x 6.5"H
 2 x 13w GU24 Bulbs (Included)
 1600 Rated Lumens



85407MCAT 1-Light Pendant
 Artesian Bronze
 10.5"W x 21.5"H
 1 x 18w GU24 Bulb (Included)
 1100 Rated Lumens



85400MCAT 1-Light Post
 Artesian Bronze
 10.5"W x 23"H
 1 x 18w GU24 Bulb (Included)
 1100 Rated Lumens



85402MCAT 1-Light Wall
 Artesian Bronze
 7"W x 12"H x 9"Ext.
 HCO 5.5" • BP 4.5"W x 7.5"H
 1 x 13w GU24 Bulb (Included)
 800 Rated Lumens

Balboa ES

VIVEX™

- Self Ballasted GU24 Bulbs
- 2700 K Color Temperature
- 10,000 Rated Life Hours
- Meets California Title 24 Requirements

85165GFCO 1-Light Wall
Copper Oxide
12"W x 17.5"H x 14"Ext.
HCO 6" • BP 5.5"W x 11.5"H
1 x 26w GU24 Bulb (Included)
1680 Rated Lumens



85164GFCO 1-Light Wall
Copper Oxide
10"W x 14"H x 11.5"Ext.
HCO 6" • BP 5.5"W x 11.5"H
1 x 18w GU24 Bulb (Included)
1100 Rated Lumens



85163GFCO 1-Light Wall
Copper Oxide
7.5"W x 11.5"H x 9.5"Ext.
HCO 4.5" • BP 4.5"W x 7.5"H
1 x 13w GU24 Bulb (Included)
800 Rated Lumens



85162GFCO 1-Light Wall
Copper Oxide
6.5"W x 9.5"H x 8"Ext.
HCO 4.5" • BP 4.5"W x 7.5"H
1 x 13w GU24 Bulbs (Included)
800 Rated Lumens



85167GFCO 1-Light Pendant
Copper Oxide
12"W x 18.5"H
1 x 18w GU24 Bulb (Included)
1100 Rated Lumens



85160GFCO 1-Light Post
Copper Oxide
10"W x 15.5"H
1 x 18w GU24 Bulb (Included)
1100 Rated Lumens

Lake Shore ES

VIVEX™

- Self Ballasted GU24 Bulbs
- 2700 K Color Temperature
- 10,000 Rated Life Hours
- Meets California Title 24 Requirements



85483LTAP 1-Light Wall
Antique Pecan
8.5"W x 16.5"H x 10"Ext.
HCO 8.5" • BP 5.5"W x 12.5"H
1 x 23w GU24 Bulb (Included)
800 Rated Lumens



85485LTAP 1-Light Wall
Antique Pecan
12"W x 25"H x 14.5"Ext.
HCO 11.5" • BP 7"W x 20.5"H
1 x 26w GU24 Bulb (Included)
1680 Rated Lumens



85484LTAP 1-Light Wall
Antique Pecan
11"W x 21"H x 12.5"Ext.
HCO 9.5" • BP 5"W x 17.5"H
1 x 18w GU24 Bulb (Included)
1100 Rated Lumens



85482LTAP 1-Light Wall
 Antique Pecan
 7"W x 9.5"H x 7.5"Ext.
 HCO 3" • BP 4.5"W x 11"H
 1 x 13w GU24 Bulb (Included)
 800 Rated Lumens



85487LTAP 1-Light Pendant
 Antique Pecan
 11"W x 17"H
 1 x 18w GU24 Bulb (Included)
 1100 Rated Lumens



85480LTAP 1-Light Post
 Antique Pecan
 11"W x 17.5"H
 1 x 18w GU24 Bulb (Included)
 1100 Rated Lumens

Pacific Heights ES

VIVEX™

- Self Ballasted GU24 Bulbs
- 2700 K Color Temperature
- 10,000 Rated Life Hours
- Meets California Title 24 Requirements

85493TLML 1-Light Wall
Mottled Leather
8.5"W x 17.5"H x 10.5"Ext.
HCO 9.5" • BP 5.5"W x 12.5"H
1 x 13w GU24 Bulb (Included)
800 Rated Lumens



85494TLML 1-Light Wall
Mottled Leather
11"W x 23.5"H x 12.5"Ext.
HCO 12" • BP 6.5"W x 15.5"H
1 x 18w GU24 Bulb (Included)
1100 Rated Lumens



85495TLML 1-Light Wall
Mottled Leather
13.5"W x 27.5"H x 16"Ext.
HCO 18" • BP 6.5"W x 15.5"H
1 x 26w GU24 Bulb (Included)
1680 Rated Lumens



85492TLML 1-Light Wall
Mottled Leather
6.5"W x 10"H x 7"Ext.
HCO 3" • BP 5"W x 9"H
1 x 13w GU24 Bulb (Included)
800 Rated Lumens



85497TLML 1-Light Pendant
Mottled Leather
11"W x 20.5"H
1 x 18w GU24 Bulb (Included)
1100 Rated Lumens



85490TLML 1-Light Post
Mottled Leather
11"W x 22"H
1 x 18w GU24 Bulb (Included)
1100 Rated Lumens

Whisper Dark Sky ES

- Self Ballasted GU24 Bulbs
- 2700 K Color Temperature
- 10,000 Rated Life Hours
- Die Cast Aluminum
- Meets California Title 24 Requirements



85393 BZ, SE 1-Light Wall
8"W x 19.5"H x 9.5"Ext.
HCO 9.5" • BP 5"W x 9.5"H
1 x 13w GU24 Bulb (Included)
800 Rated Lumens



85394 BZ, SE 1-Light Wall
10"W x 24.5"H x 13"Ext.
HCO 12.5" • BP 5.5"W x 12.5"H
1 x 18w GU24 Bulb (Included)
1100 Rated Lumens



9001.....	39	21153.....	3	53256.....	66
9002.....	39	21155.....	2	53257.....	62,66
9003.....	39	21156.....	1	53258.....	52,54
9004.....	39	21158.....	4	53259.....	66
9011.....	33	21159.....	4	53260.....	66
9012.....	33	21340.....	8	53261.....	66
9013.....	33	21343.....	7	53265....	58,62,64,66
9014.....	33	21344.....	6	53267....	58,62,64,66
9021.....	37	21345.....	6	53268....	58,62,64,66
9022.....	37	21346.....	5	53269.....	58,66
9023.....	37	21347.....	8	53272.....	58
9024.....	37	21348.....	7	53273.....	52,54
9031.....	38	21500.....	25	53274.....	52,54,58
9032.....	38	21501.....	25	53275.....	66,67
9033.....	38	21503.....	25	53286.....	52
9034.....	38	21504.....	24		54,58,62,64,67
9041.....	35	21505.....	23	53287.....	52
9042.....	35	21507.....	24		54,58,62,64,67
9043.....	35	21511.....	26	53288.....	52,54,67
9044.....	35	21512.....	26	53305.....	66,67
9051.....	34	21513.....	26	53310.....	66,67
9052.....	34	21514.....	26	53311....	52,54,62,67
9053.....	34	22164.....	31	53313.....	62,64,68
9054.....	34	22165.....	31	53315....	52,54,62,67
10001.....	36	22168.....	32	53316.....	56,67
10002.....	36	22169.....	32	53320.....	52
10003.....	36	23031.....	11		54,58,62,64,67
10004.....	36	23033.....	12	53350.....	52,54
12050.....	30	23035.....	10	53352.....	62,64
12053.....	30	23036.....	9	53353.....	62,64
12054.....	29	23038.....	12	53354.....	62,64
12055.....	28	23039.....	11	53355.....	62,64
12057.....	27	39981.....	18	53364.....	56,60
12059.....	29	39982.....	17	53365.....	56,60
12751.....	21	39983.....	17	53368.....	56,60
12753.....	21	39984.....	16	53370.....	56,60
12755.....	20	39985.....	15	53373.....	56,60
12758.....	19	39986.....	14	53374.....	56,60
12759.....	20	39987.....	13	53380.....	56,60,68
12761.....	22	39989.....	18	53381.....	56,60,68
12762.....	22	53201.....	65	53383.....	58,64
12763.....	22	53253.....	64	53385.....	58,64,68
12764.....	22	53254.....	66	53386.....	58,64,68
21151.....	3	53255.....	52	53387.....	58,64
21152.....	4		54,58,62,64,66	53389.....	60,68

53390.....	60,68	54340.....	45	85813.....	40
53393....	52,54,62,68	54341.....	46	85814.....	40
53430.....	53	54345.....	46	86190.....	50
53431.....	53	54346.....	46	86192.....	50
53432.....	53	82686.....	42	86194.....	50
53433.....	53	82687.....	42	86195.....	48
53434.....	53	82688.....	42	86197.....	48
53441.....	55	82689.....	42	86200.....	49
53442.....	55	82699.....	41	86201.....	49
53443.....	55	83095.....	43	86202.....	49
53445.....	55	83098.....	44	86204.....	47
53450.....	51	83099.....	44	86205.....	47
53451.....	51	83102.....	44	86206.....	47
53452.....	51	85000.....	70	86207.....	47
53453.....	51	85002.....	70	86208.....	47
53454.....	51	85005.....	69	86222.....	48
53464.....	52,54	85006.....	69	86300.....	45
53465.....	52,54	85160.....	74	86303.....	45
53467.....	52,54	85162.....	74	91150.....	3
53468.....	52,54	85163.....	73	91340.....	8
53469.....	52,54	85164.....	73	91500.....	24
53530.....	57	85165.....	73	92160.....	32
53531.....	57	85167.....	74	92750.....	21
53533.....	57	85393.....	79	93031.....	12
53534.....	57	85394.....	79		
53535.....	57	85400.....	72		
53541.....	59	85402.....	72		
53542.....	59	85403.....	71		
53543.....	59	85404.....	71		
53545.....	59	85405.....	71		
53700.....	61	85407.....	72		
53701.....	61	85409.....	72		
53702.....	61	85480.....	76		
53703.....	61	85482.....	76		
53704.....	61	85483.....	75		
53710.....	61	85484.....	75		
53711.....	61	85485.....	75		
53712.....	61	85487.....	76		
53713.....	61	85490.....	78		
53714.....	61	85492.....	78		
53720.....	63	85493.....	77		
53721.....	63	85494.....	77		
53722.....	63	85495.....	77		
53723.....	63	85497.....	78		
53724.....	63	85812.....	40		

Finishes

ABZ	Architectural Bronze
AL	Aluminum
AP	Antique Pecan
AT	Artesian Bronze
BZ	Bronze
CO	Copper Oxide
ML	Mottled Leather
OI	Oil Rubbed Bronze
PC	Polished Chrome
PL	Platinum
PN	Polished Nickel
PS	Plated Silver
SE	Sienna
SN	Satin Nickel
SST	Stainless Steel
UB	Umber Bronze


Glass Styles

CL	Clear
CY	Crystal
DW	Dusty White
FT	Frosted
GF	Golden Frost
LT	Latte
MC	Mocha Cloud
MR	Marble
SW	Satin White
TL	Tawny Linen
WT	White

Shades


WH	Wheat Fabric
WT	White

Catalog Legend

 Energy Star Certified
Installing new ENERGY STAR qualified light fixtures is a smart way to save energy and money. Maxim Lighting is proud to be a ENERGY STAR partner. Look for this ENERGY STAR logo to find Maxim Lighting fixtures that use 75% of the energy of traditional incandescent fixtures and last up to 10 times longer. More information on ENERGY STAR can be found on the ENERGY STAR web site at energystar.gov.

California Title 24
All new homes, additions, alterations and most commercial buildings in California must meet minimum energy efficiency standards contained in Title 24, Part 6 of the California Code of Regulations. More information on California Title 24 can be found on the California Energy Commission web site at energy.ca.gov/title24.

 Installs Up or Down

 Installs on Slope Ceiling



All electrical products are certified and listed to CSA/ETL/UL Standards for use in U.S.A. and Canada except where noted.

LMXCAT1006
\$5.00



MAXIM LIGHTING®



Maxim Lighting International

253 North Vineland Avenue
City of Industry, California
91746
USA

General Info: 626.956.4200
Customer Service: 800.486.2946
General Fax: 626.956.4235

Dallas Trade Mart: 214.748.8455
Showroom: 3901
Email: info@maximlighting.com
Web: www.maximlighting.com

Maxim Lighting and all designs, logos and images ©2010 Maxim Lighting International. All Rights Reserved. Printed in China